



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		25%GF更改为23%GF	CSX	03/24/06	
△		增加UL刻字	CSX	04/23/07	
△		品名、料号增加环保标识“(回)”	YeJ	12/08/07	

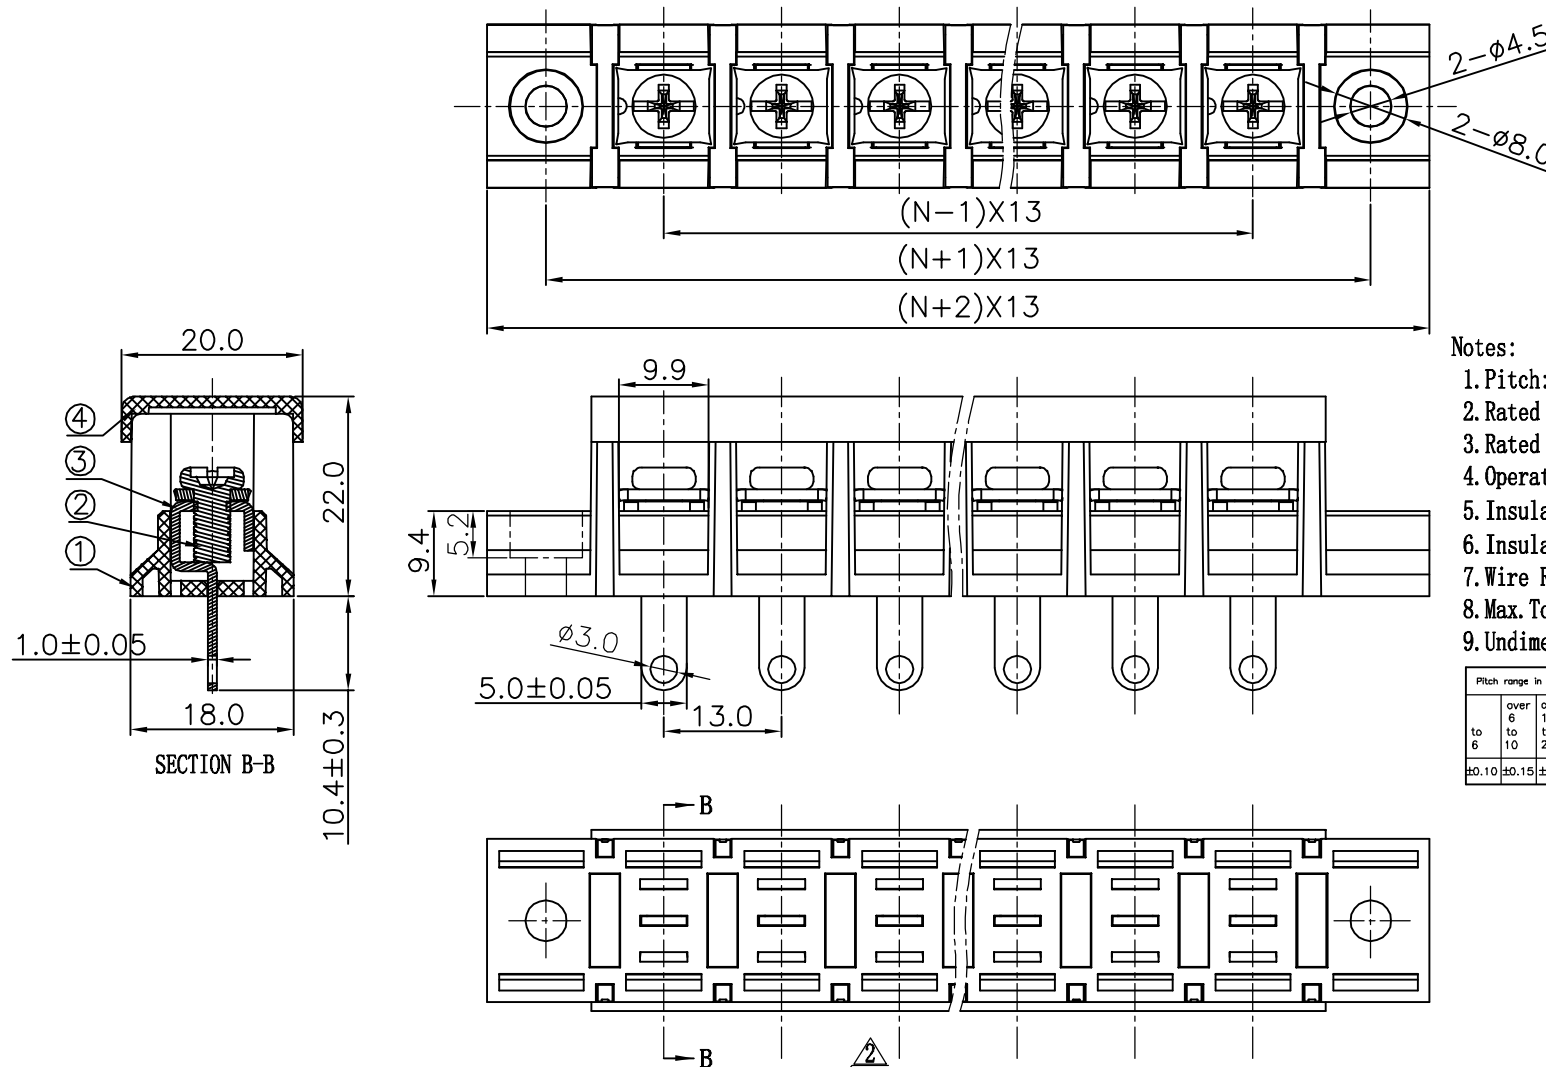

Notes:

1. Pitch:13mm , Poles:2-18P
2. Rated current:40A
3. Rated voltage:600V
4. Operation temperatures:-30° C~+120° C
5. Insulation Withstand Voltage:AC2000V/1min
6. Insulation Resistance:1000MΩ/DC500V
7. Wire Range:18~10AWG
8. Max. Torque Value:12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6	10	10	30	30	60	60	150
to	to	to	to	to	to	to	to	to
6	10	24	30	60	100	150	150	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/0.1

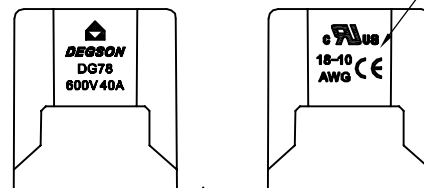

4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78H Pin header	5009B00030 (H)	XX	Brass	SnCe plated
2	M4*8(8*10)bright Screws	S000000510 (H)	XX	Steel	Ni plated

1	DG78 Housing	5034M0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 01/13/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG78H-A-XXP-1Y-00A(H) DRAWING NO. DG78H-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	ANGLES ± 1°	G.E :		
	THIRD ANGLE PROJECTION	FINISH :	SCALE : 1:1		