
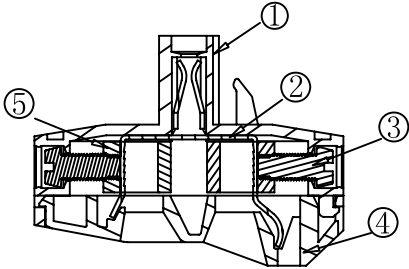
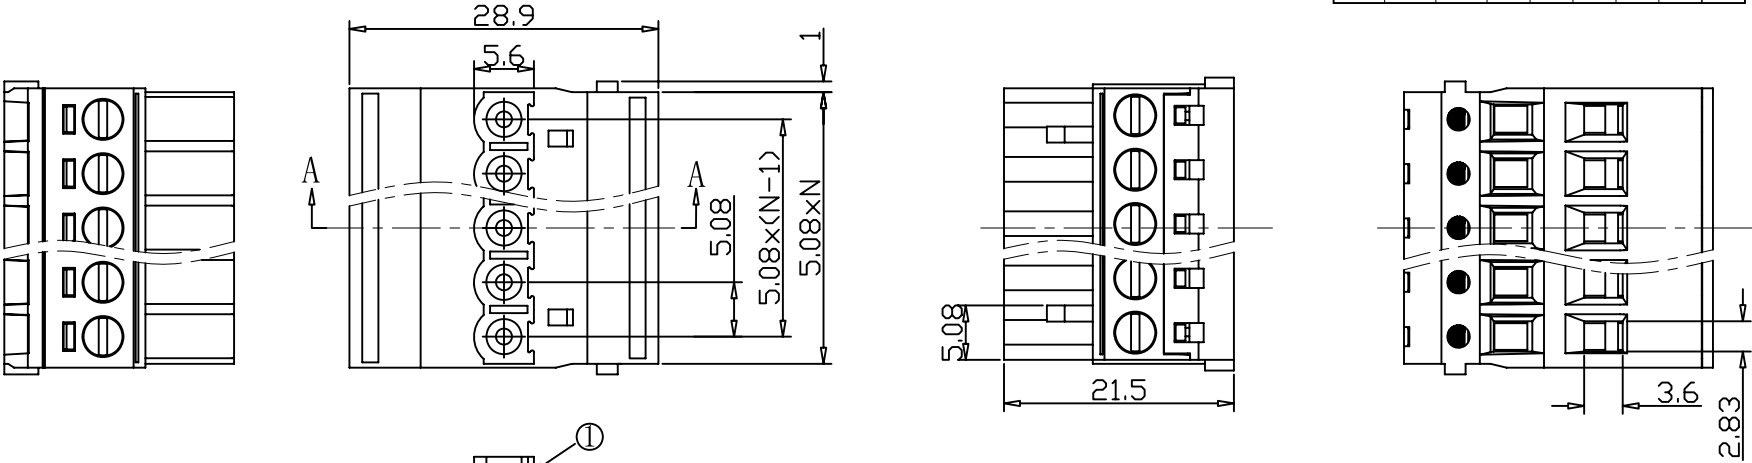


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

- Notes:
- 1. Pitch:5.08mm, Poles:2-12P
 - 2. Rated voltage/current : UL1059 300V/10A
IEC 250V/15A
 - 3. Operation temperatures: -40° C~+105° C
 - 4. Withstanding voltage : AC2000V/1min
 - 5. Insulation resistance: 5000MΩ/DC1000V
 - 6. Wire Range:30~12AWG , 2.5mm²
 - 7. Max. Torque Value:M2.5 , 4.08kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∅
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

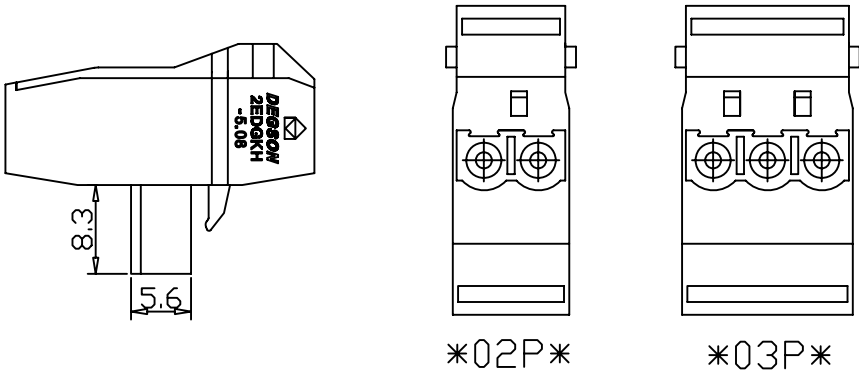

5	DG128 Cage	X000000020 (H)	2XX	Steel	Cr ³⁺ Zn
4	2EDGKH-5.08 Cover	1190C0YXXA (H)	1	PA66	UL94V-0
3	2EDGKH-5.08 Screw	S000001370 (H)	2XX	Steel	Cr ³⁺ Zn
2	2EDGKH-5.08 Clamp	1190B00010 (H)	XX	Phosphor bronze	SnCe

1	2EDGKH -5.08 Housing	1190A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO.OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DFTO HXG	DATE 02/11/09	<div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME 2EDGKH-5.08-XXP-1Y-00A (H)</div> <div>DRAWING NO. 2EDGKH-5.08-E01 /PART NO.</div> <div>DO NOT SCALE DRAWING</div>	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	G.E :			
ANGLES ± 1°		FINISH:		SIZE A3 REV TO 09/03/09	
THIRD ANGLE PROJECTION		SCALE : 1:1		SHEET 1 OF 1	