


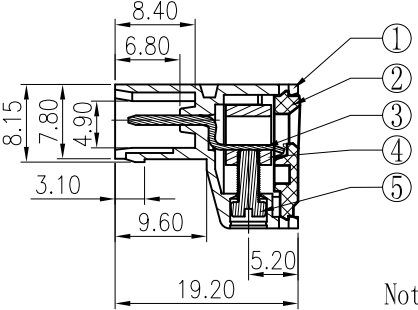
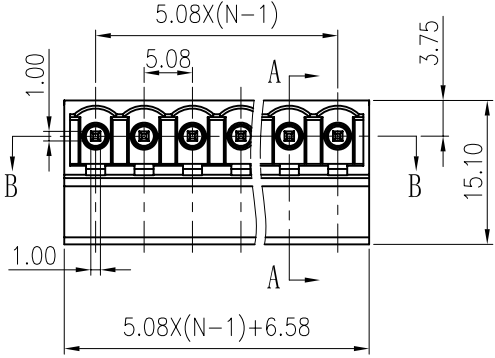


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面整理	Apple	04/07/08*
△		修改参数	LJH	09/30/08*
△		增加UL刻字	WLM	11/12/08*




Section A-A


- Notes:
- Pitch:5.08mm ,Poles:2-24P
 - Rated voltage/current:UL 300V/15A
IEC 320V/20A △
 - Operation temperatures:-40℃~+105℃
 - Withstanding Voltage:AC2000V/1min
 - Insulation Resistance:5000MΩ /DC1000V
 - Wire Range:28~12AWG, 2.5mm² △
 - Max. Torque Value:M2.5, 4.08Kgf.cm
 - Undimensioned Tolerances:



Section B-B



Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

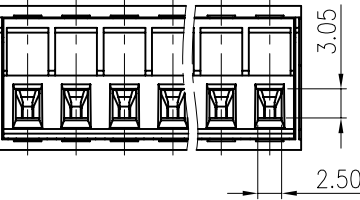

5	2EDG "—"Screws-M2.5	S000001370 (H)	XX	Steel	Cr ³⁺ Zn
4	DG128 Brass cage	X000000020 (H)	XX	Brass	Ni plated
3	2EDGKR-Pin	1159B00010 (H)	XX	Copper	SnCe

2	2EDGK-5.08-Cover	1005C0YXXA (H)	1	PA66	UL94V-0
1	2EDGKR-5.08-Housing	1159A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETAILED LISTS		DATE 03/16/08*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
TOLERANCES EXCEPT AS NOTED		DATE	NAME 2EDGKR-5.08-XXP-1Y-00A (H)		
MM (INCH)		DATE	DRAWING NO. 2EDGKR-5.08-E01		
MM		DATE	/PART NO.		
.0 ±		DATE	DO NOT SCALE DRAWING		
.00 ±		DATE	SHEET 1 OF 1		
.000 ±		DATE	REV T3 11/12/08*		
ANGLES ± 1°		DATE			
THIRD ANGLE PROJECTION		DATE			