
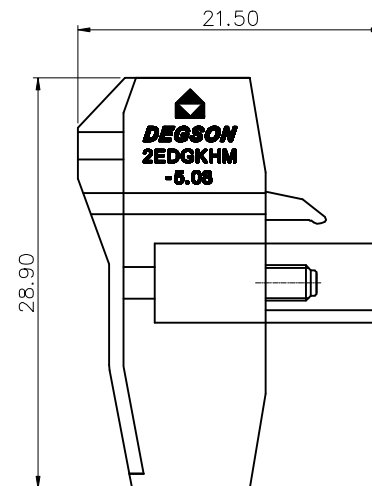
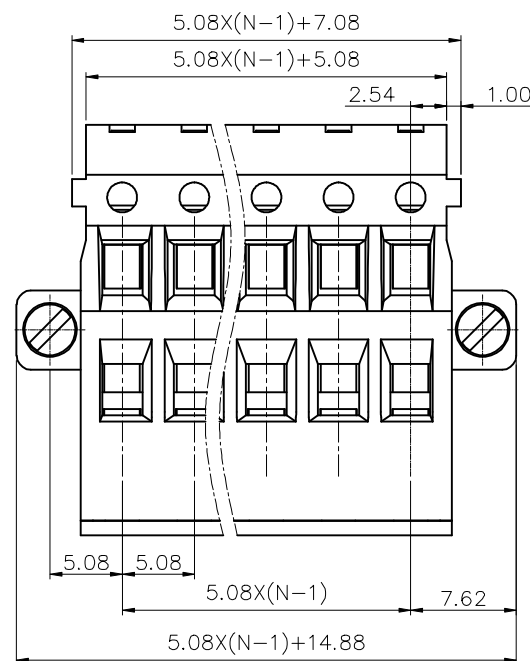


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

02P: Clasp on the
left from this view

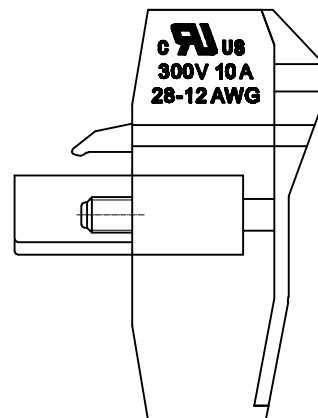

2EDGKHM - 5.08 - XXP - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Pitch) (Poles) (Single Pitch)
(Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M2.5 , 3.54Lb.in
- 4.Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	15A

- 2.Torque value : M2.5 , 0.4N·m
- 3.Wire range : 2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~12P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		
TO 6	Over 6 TO 10	TO 30	Over 30 TO 60	Over 60 TO 100
±0.15	±0.20	±0.30	±0.30	±0.70
				±1.00
				±1.30
				±2'

- 6.RoHS Compliance

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME:			
	CHKD:	2EDGKHM-5.08-XXP-1Y-00A(H)			
	DRFT:	TITLE: CUSTOMER DRAWING		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
MM (INCH)		DO NOT SCALE DRAWING	SCALE	1:1	