

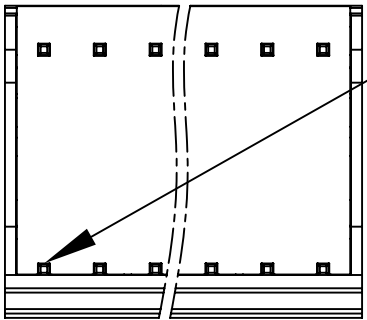
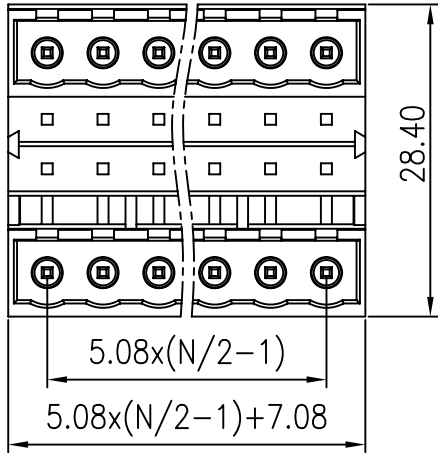

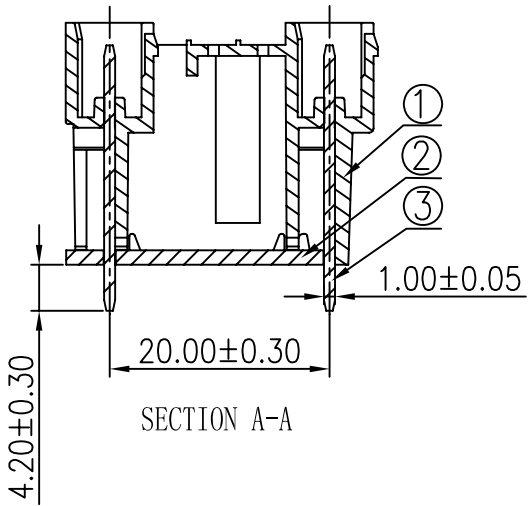


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		品名、料号增加环保标示“(H)”	LJH	12/11/07	
△		增加VDE刻字及参数	Zengy	12/09/08	

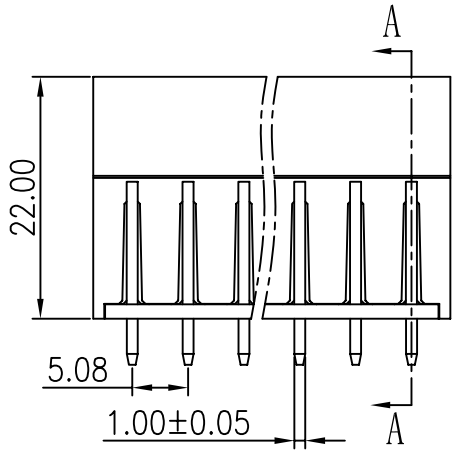

注：盖与座需超音波焊接

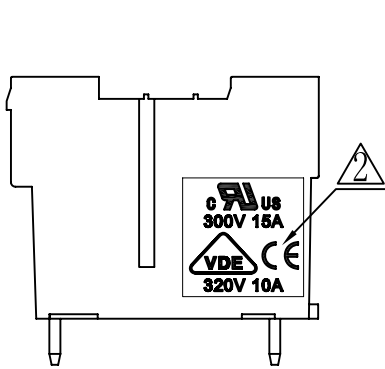

- Notes:
1. Pitch: 5.08mm , Poles: 4-48P
  2. Rated voltage/current: UL 300V/15A  
VDE 320V/10A
  3. Operation temperatures: -40°C ~ +105°C
  4. Withstanding Voltage: AC2000V/1Min
  5. Insulation Resistance: 5000MΩ/DC1000V
  6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	to	over	to	over	to	
6	10	10	24	30	60	100	150		□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

1	2EDGVH-5.08 Housing	1062A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
<div><div>DEGSN</div><div>NAME 2EDGVH-5.08-XXP-1Y-00A(H)</div><div>DRAWING NO. 2EDGVH-5.08-E01</div><div>DO NOT SCALE DRAWING</div></div> <div><div>DEGSN</div><div>宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD</div><div>SIZE A3</div><div>REV T2 12/09/08</div></div>					
SHEET 1 OF 1					

3	2EDGVH Pin header	1061B00020(H)	XX	Brass	SnCe
2	2EDGVH-5.08 Cover	1062C0YXXA(H)	1	PA66	UL94V-0