

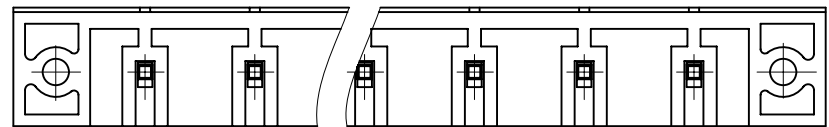
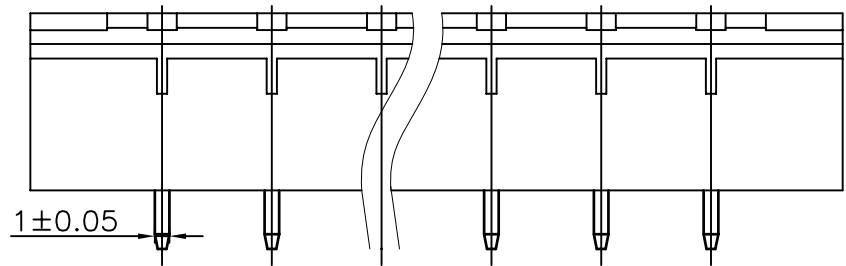
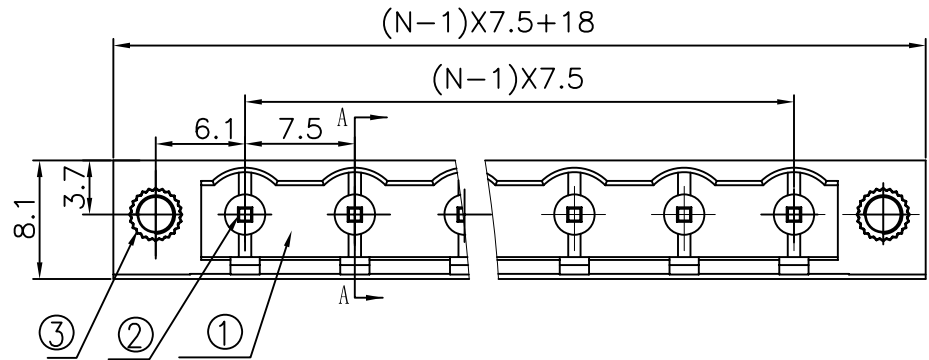




REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加VDE、CE刻字	YeJ	02/29/08	



- Notes:
- pitch: 7.5mm poles:2-12p
 - Rated voltage/current:UL 300V/15A
VDE 400V/20A
 - Withstanding voltage: AC2000V/1Min
 - Insulation resistance:5000MΩ/DC1000V
 - Temp. Range: -40° C~+105° C
 - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩ ◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10

3	2EDGV (A) -Pin header(1*13.7)	1007B00030 (H)	XX	Brass	SnCe
2	2EDG-Screw cap	S000000040 (H)	2	Brass	

1	2EDGVM-7. 5-Housing	1058A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>	DFTO Yangys	DATE 06/16/06"	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME 2EDGVM-7. 5-XXP-1Y-00A (H)</div>		
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
		MFO	DATE			
		APPVL	DATE			
	<div>MM .0 ± ± .00 ± ± .000 ± ±</div>	MATERIAL :				
	ANGLES ± 1°	G.E :	DRAWING NO. 2EDGVM-7.5-E01			
		FINISH :	/PART NO.		SIZE A3	REV T1 02/29/08"
		SCALE :	DO NOT SCALE DRAWING		SHEET 1	OF 1