

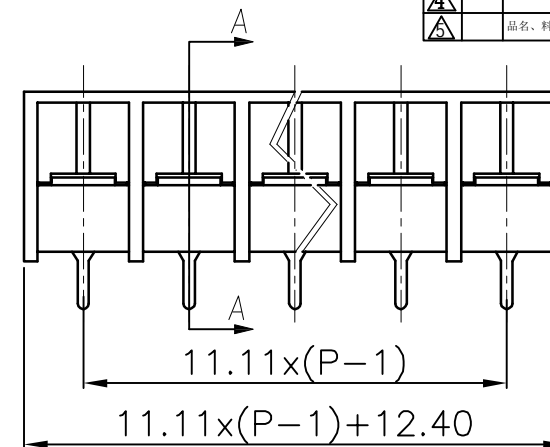
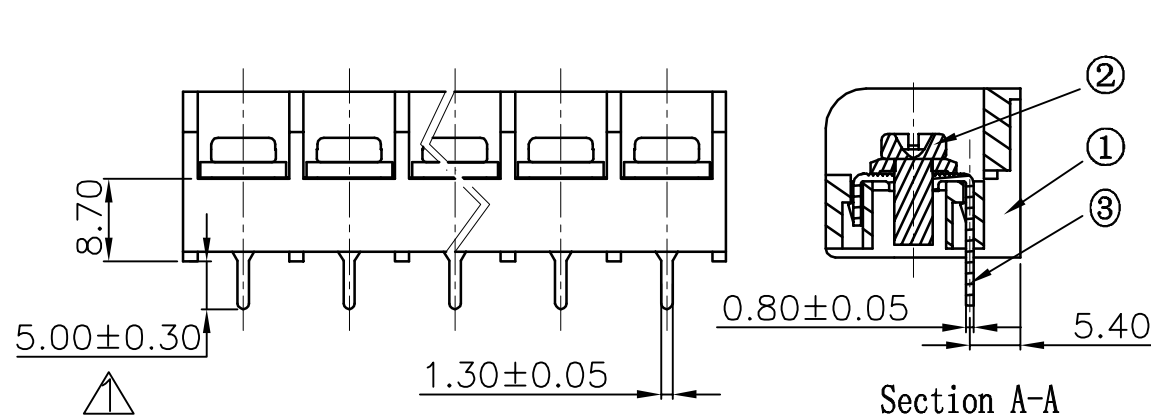


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		螺丝料号由 S000000580 变更到 S000000580	DZJ	06/29/'05	
△		绝缘尺寸由 5.00±0.10 变更到 5.00±0.20	DZJ	06/29/'05	
△		产品名称由 DG66A 变更为 DG66S	CSX	02/17/'06	
△		电流由 10A 更改为 25A	CSX	03/27/'06	
△		增加 UL 刻字	CSX	04/18/'07	
△		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

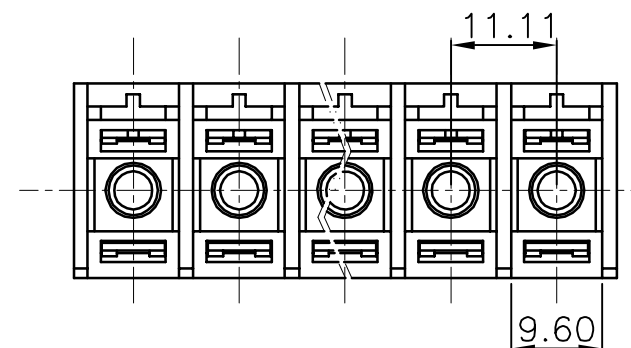

NOTES:

- Pitch: 11.1mm, Poles: 5-12P
- Rated current: 30A
- Rated voltage: 300V
- Operation temperatures: -40° C ~ +105° C
- Insulation Withstand Voltage: AC2000V/1min
- Insulation Resistance: 500MΩ/DC500V
- Wire Range: 22~10AWG
- Max. Torque: 12.24kgf.cm
- Undimensioned Tolerances:



Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	to	over	to	over	to	
6	10	10	24	30	60	100	150	150	△
±0.10	±0.15	±0.25	±0.25	±0.3	±0.5	±0.7	±1.0	±0.05/0.70	□



3	DG66S pin header	5014B00010(H)	XX	Brass	Sn plated			
2	4*8(9*9) big cover and bright screws	S000000580(H)	XX	Steel	Ni plated			
1	DG66S-B Housing	5014A0YXXA(H)	1	PA66	UL94V-0			
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES			
DETAILED LISTS			DFTO WSJ	DATE 03/19/04"				
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPVL	DATE				
	<div>MM</div> <div>.0 ±</div> <div>.00 ±</div> <div>.000 ±</div>		<div></div> <div>NAME</div> <div>DG66S-B-XXP-1Y-00A(H)</div>					
							MATERIAL :	
							ANGLES ± 1°	
			G.E :		<div>DRAWING NO. DG66S-E01</div> <div>/PART NO.</div> <div>SIZE A3</div> <div>REV 15</div> <div>12/08/07</div>			
	FINISH :							
	SCALE : 1:1							
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING					
			SHEET 1 OF 1					

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME △
DG66S-B-XXP-1Y-00A(H)

DRAWING NO. DG66S-E01
/PART NO.

SIZE A3
REV T5
12/08/07