

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.50mm, Poles : N=02~12P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm		
TO 6	Over 6 TO 10	TO 30	Over 30 TO 60	Over 60 TO 100
				Over 100 TO 150
				Over 150
				0.1/10
				<
				±2'

5.RoHS Compliance






8EDGCM - 7.5 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch)(Poles)(Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)




02P



03P

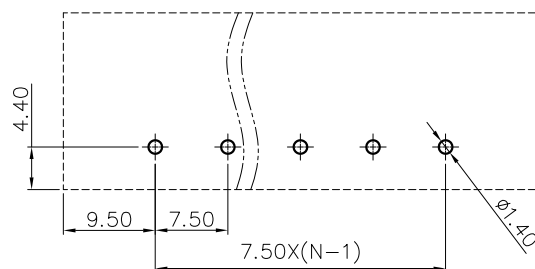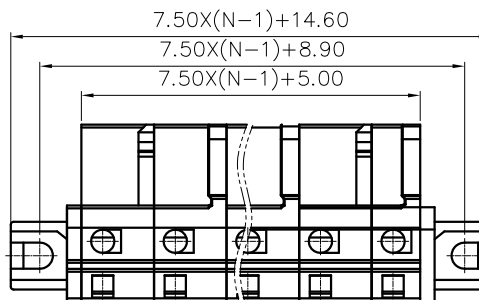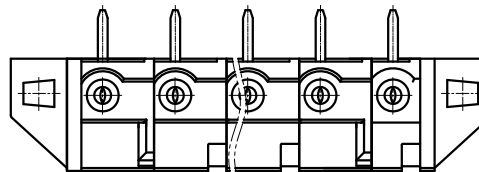

P.C.B LAYOUT

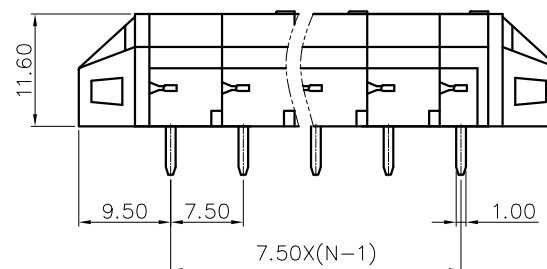

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
		DO NOT SCALE DRAWING			
		MM (INCH)		SCALE	
		1:1		1:1	



宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 8EDGCM-7.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

REV

DO

DRAWING NO.: /

SHEET

1/1

DO NOT SCALE DRAWING

SCALE

1:1