


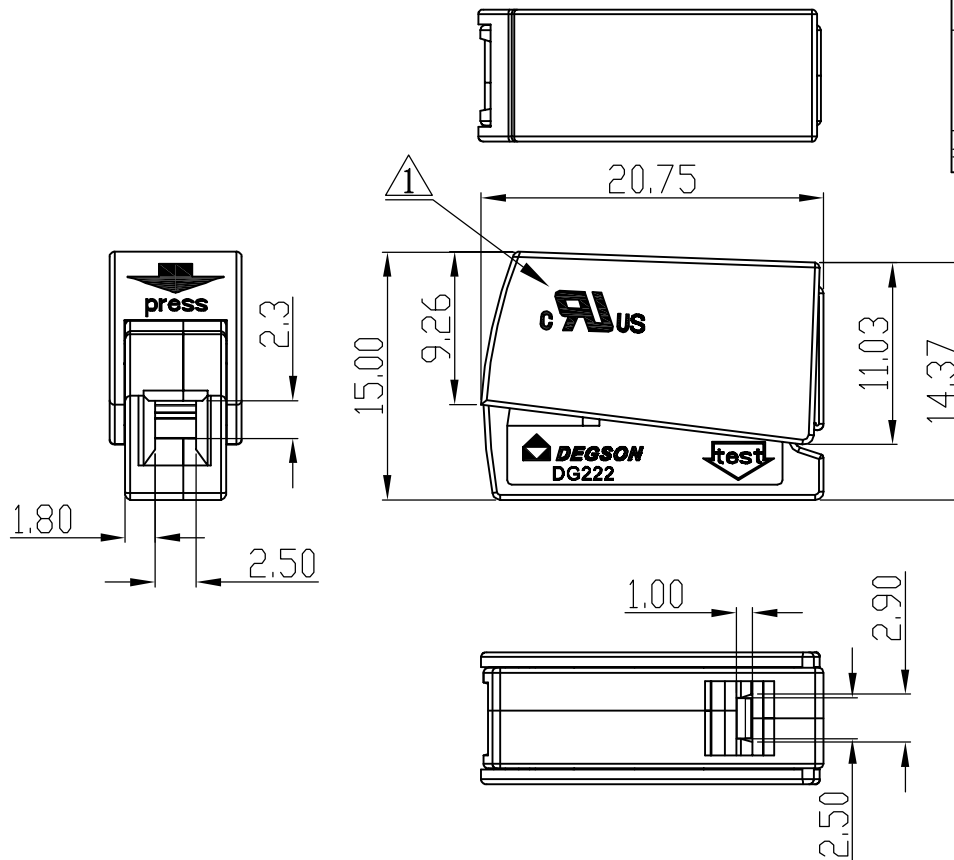

Notes:

1. Rated voltage/current: UL 300V/22A
VDE 450V/24A
2. Operation temperatures: -40° C~+105° C
3. Insulation Resistance: 5M Ω /DC500V
4. Withstanding voltage: AC2500V/1Min
5. Wire Range: "A"Direction 14~12AWG, 1.0~2.5mm²(Solid)
"B"Direction 22~12AWG, 0.2~2.5mm²(solid+strand wire)
6. Undimensioned Tolerances:

REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
10-0156		增加UL刻字	David. G	05/26/10	

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/10



2	DG222-8.0 Housing2	3042A0Y01C(H)	1	PA66	UL94V-0
1	DG222-8.0 Housing1	3042A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED				
	MM				
	0.00 ± 0.00 ± 0.00 ±				
	APPROVAL		NAME DG222-8.0-01P-1Y-00A(H)		
	DATE				
	DATE				
	DATE				
	MATERIAL :		DRAWING NO. DG222-8.0-E01 /PART NO.		
	ANGLES ± 1°				
G.E :					
THIRD ANGLE PROJECTION					
SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1	OF 1

5	DG222 Current carrier	3042B00010(H)	1	Coppo	SnCe
4	DG222 Spring	X000003780(H)	1	stainless steel	
3	DG222-8.0 Cover	3042C0Y01A(H)	1	PA66	UL94V-0