

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0017	8EDGV/RC-7.5-塑体由T0改为T1	HXG	04/07/10
△	10-0360	增加“VDE”认证标志	Jinhai. Lao	09/04/10

## Notes:

1. Pitch: 7.5mm, Poles: 2-12P

2. Rated voltage/current: UL 300V/15A

VDE 400V/20A △







3. Operation temperatures: -40°C ~ +105°C

4. Withstanding Voltage: AC2500V/1min

5. Insulation Resistance: 5000MΩ/DC1000V

6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

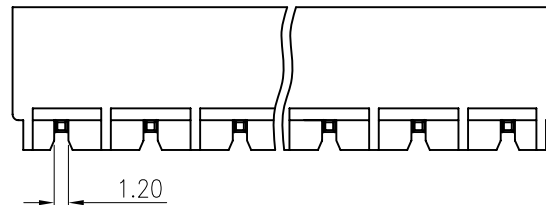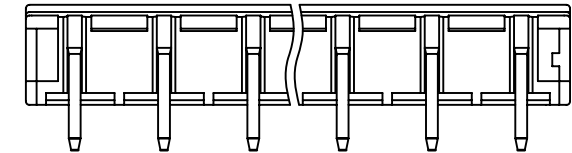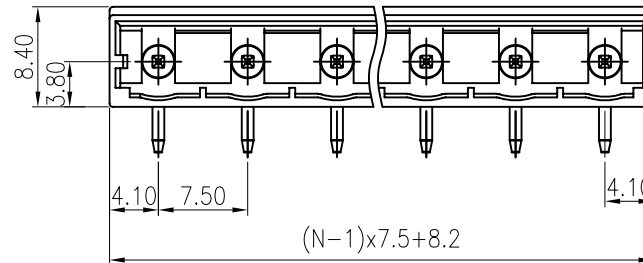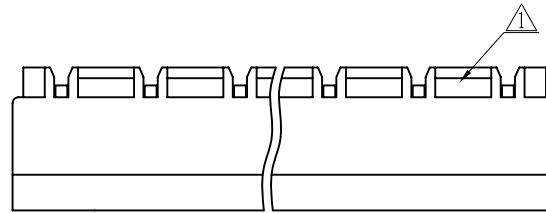

2	2EDGR Pin header	1008B00040 (H)	XX	Brass	SnCe
1	8EDGV/RC-7.5 Housing △	1122A41XXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →	DATE 05/04/08*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED	CHKD DATE			
	MM	MFD DATE			
	.0 ±	APPVL DATE			
	.00 ±				
	.000 ±				
	ANGLES ± 1°	G.E :	NAME 8EDGRC-7.5-XXP-11-01A(H)		
		FINISH:	DRAWING NO. 8EDGRC-7.5-E01		SIZE A4
	THIRD ANGLE PROJECTION	SCALE : 1:1	/PART NO.		REV T2
			DO NOT SCALE DRAWING		09/04/10*
			SHEET 1 OF 1		