











REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

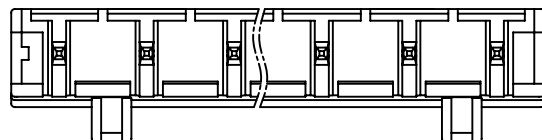

02P



03P

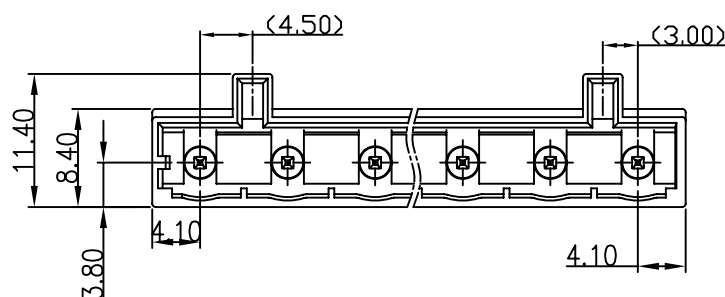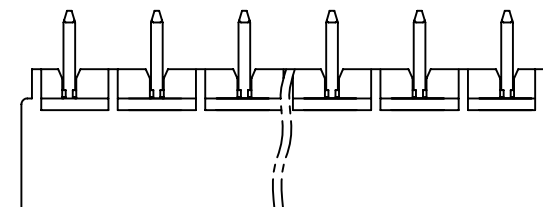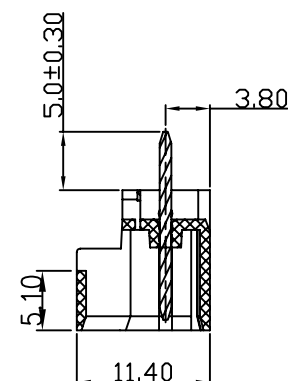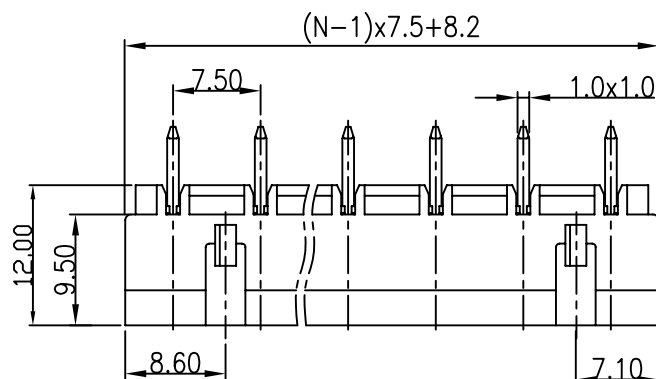

Notes:

1. Pitch: 7.5mm, Poles: 2-12P
2. Rated voltage/current: UL1059 300V/15A
IEC 400V/20A
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	8EDGVCB-Pin header	1203B00010 (H)	XX	Copper	SnCe	
1	8EDGVCB-7.5 Housing	1204A41XXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS			DFTO HXG	DATE 09/12/09		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MM .0 ± ± .00 ± ± .000 ± ±		MATERIAL :		NAME	
	ANGLES ± 1°		G.E :		8EDGVCB-7.5-XXP-11-01A(H)	
			FINISH:		DRAWING NO. 8EDGVCB-7.5-E01	
			SCALE : 1:1		/PART NO.	
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SIZE A3	REV TO 02/22/10
					SHEET 1	OF 1