


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE

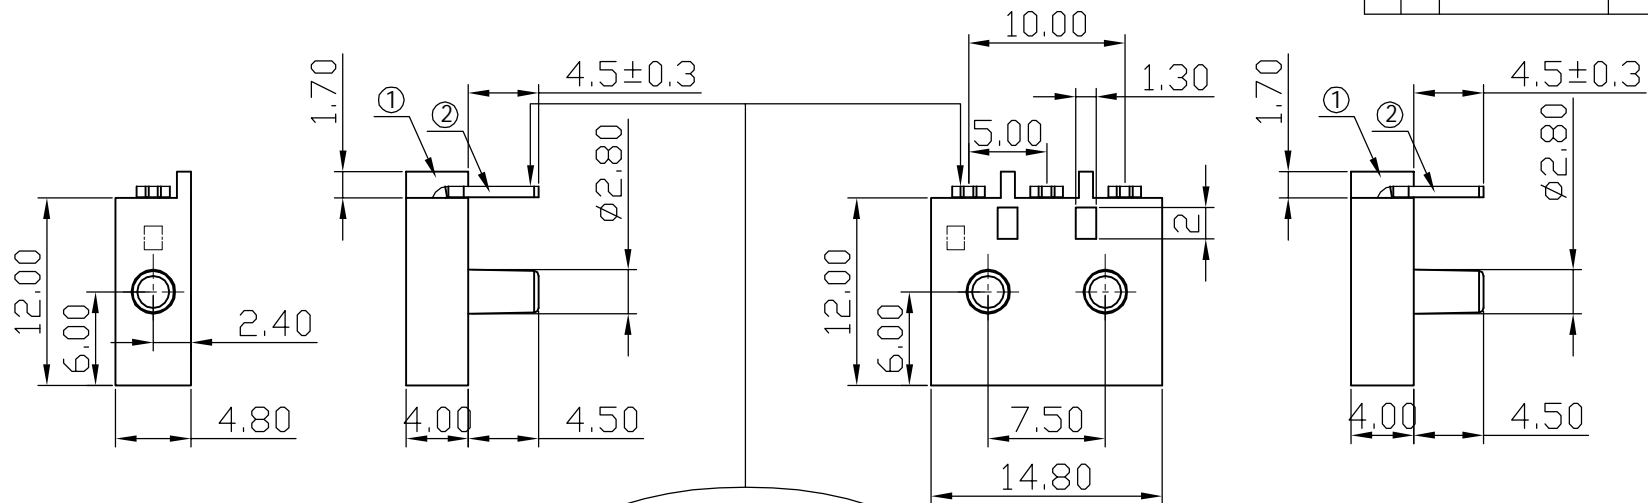

P=1

装配时焊脚光面一律朝外


P=3

Notes:



- Pitch: 5.0mm , Poles: 1-3P
- Rated voltage/current: UL1059 300V/2A
IEC 250V/4A
- Operation temperatures: -40℃~+125℃
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Contact Resistance: <5mΩ
- Wire Range: 0.14~0.5mm²
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

模穴号1-7

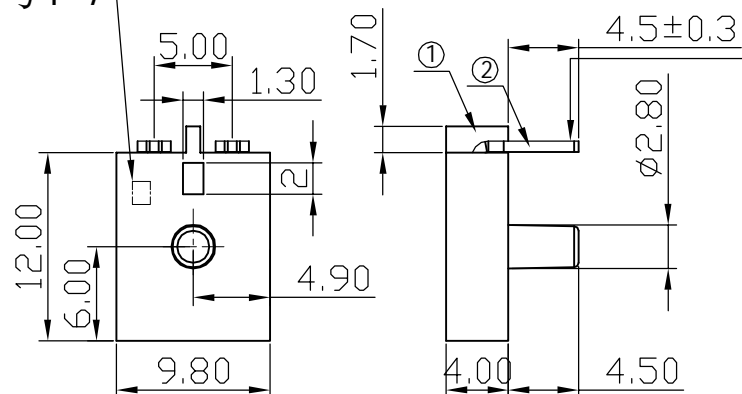

P=2

2	DG106-10A-Pin header	4146B00020(H)	XX	Brass	SnCe		
1	DG106-Housing	4146A17XXA(H)	1	PC	UL94V-0		
ITEM		NAME OF PART		NO. OF PART	Q*TY	MATERIAL	NOTES
DETACHED LISTS	<div>MM (INCH)</div>		DFTD YHG	DATE 10/09/08*	<div> DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG106-5.0-XXP-17-10A(H) (1-3P)</div>		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			
			MFD	DATE			
			APPVL	DATE			
			MATERIAL :				
	<div>MM .0 ± .00 ± .000 ±</div>		<div>± ± ±</div>				
	ANGLES ± 1°		G.E :				
	<div></div>		FINISH:		<div>DRAWING NO. DG106-5.0-E03</div> <div>/PART NO.</div> <div>SIZE A3</div> <div>REV TO 10/30/09*</div>		
	THIRD ANGLE PROJECTION		SCALE : 1:1				
	DO NOT SCALE DRAWING				SHEET 1		OF 1