

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 30A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 26~10AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	6.0 KV	6.0 KV	6.0 KV
Rate voltage(V)	1000V	630V	500V
Rate current(A)	32A		

- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.5~6.0mm²






NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=01~XXP
- 3.Stripping length : 13-14mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				
To 6	Over 6 To 10	Over 10 To 24	To 30	Over 30 To 60	Over 60 To 100	Over 100 To 150	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2'

6.RoHS Compliance

DG107R - 7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

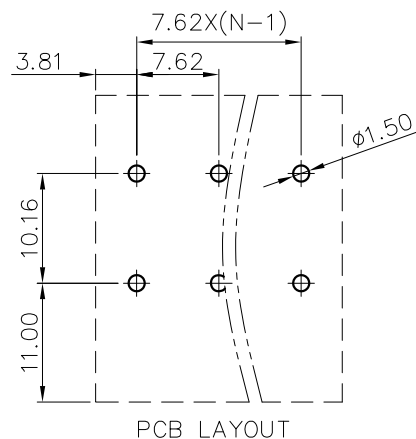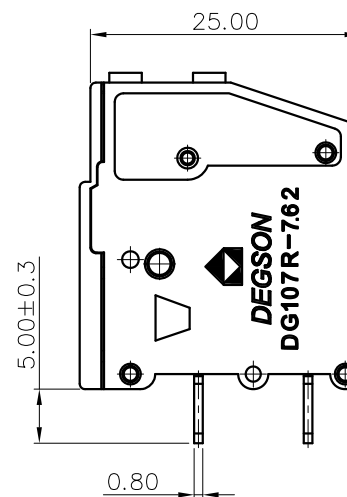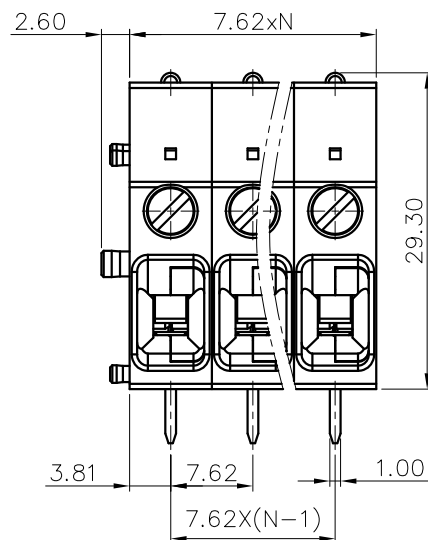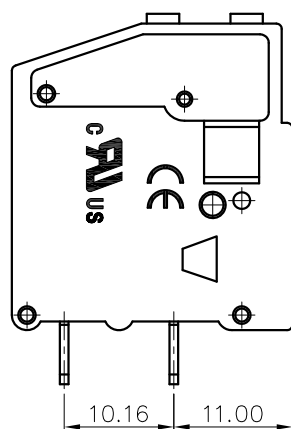

DETACHED LISTS	PART NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/	NAME: DG107R-7.62-XXP-1Y-00A(H)		
	CHKD:	/	TITLE: CUSTOMER DRAWING		
	DRFT:	/	DRAWING NO.: / DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION			REV	DO	
MM (INCH)			SHEET	1/1	
			SCALE	1:1	