


- Notes:
- 1. Pitch:5.0mm , Ploes: XXP
 - 2. Rated voltage/current:UL 300V/15A Δ
VDE 250V/24A
 - 3. Operation temperatures:-40° C~+105° C
 - 4. Insulation Withstand Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000M Ω /DC1000V
 - 6. Wire Range:24~12AWG , 2.5mm²
 - 7. Max. Torque Value: M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
Δ		Drawing Revise	Haoyh	03/10/06
Δ		修改线数: 改为每个焊脚代表一线	LJH	03/22/08
Δ	10-0363	修改技术参数	ZXX	10/28/10

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10	

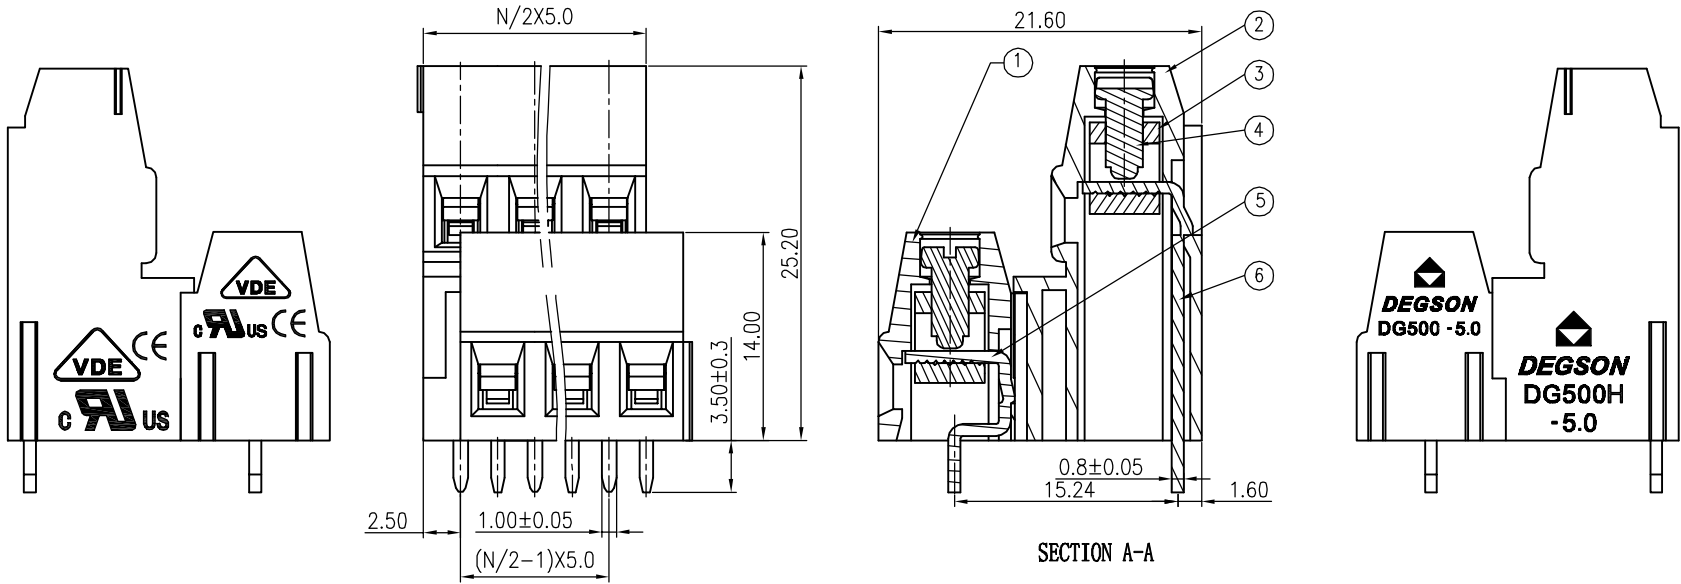

6	DG500H-Pin header	4038B00010 (H)	Δ	XX/2	Brass	SnCe
5	DG128-Pin header	4027B00010 (H)	Δ	XX/2	Brass	SnCe
4	DG128"-Screw	S000001460 (H)	Δ	XX	Steel	Cr ³⁺ Zn
3	DG128 Brass Cage	X000000020 (H)	Δ	XX	Brass	Ni plated
2	DG500H-5.0-Housing	Δ 4037A0Y (XX/2) A (H)		1	PA66	UL94V-0

1	DG500-5.0-Housing	Δ 4045A0Y (XX/2) A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO longxc	DATE 08/25/04"	<div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG500A-5.0-XXP-1Y-00A(H)</div> <div>DRAWING NO. DG500A-5.0-E01</div> <div>/PART NO.</div> <div>DO NOT SCALE DRAWING</div>	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
MM		APPLV	DATE		
ANGLES $\pm 1^\circ$		MATERIAL :		G.E :	
THIRD ANGLE PROJECTION		FINISH :		SCALE :	
				DO NOT SCALE DRAWING	
				SHEET 1 OF 1	