
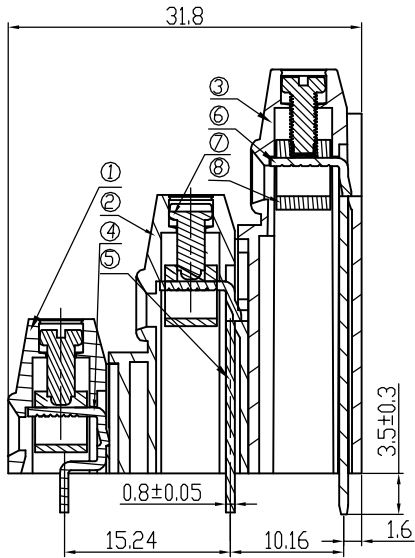



- Notes:
1. Pitch: 5.08mm , Ploes: XXP
 2. Rated voltage/current: UL 300V/15A Δ VDE 250V/24A
 3. Operation temperatures: -40° C~+105° C
 4. Wrthstanding voltage: AC2000V/1Min
 5. Insulation resistance: 5000M Ω /DC1000V
 6. Wire range: 24~12AWG ,2.5mm²
 7. Max. Torque Value: M2.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
Δ		Drawing Revise	Huoyh	04/28/08
Δ		修改线数: 改为每个焊脚代表一线	LJH	03/22/08
Δ	10-0363	修改技术参数	ZXX	10/28/10

Pitch range in mm			Naminal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

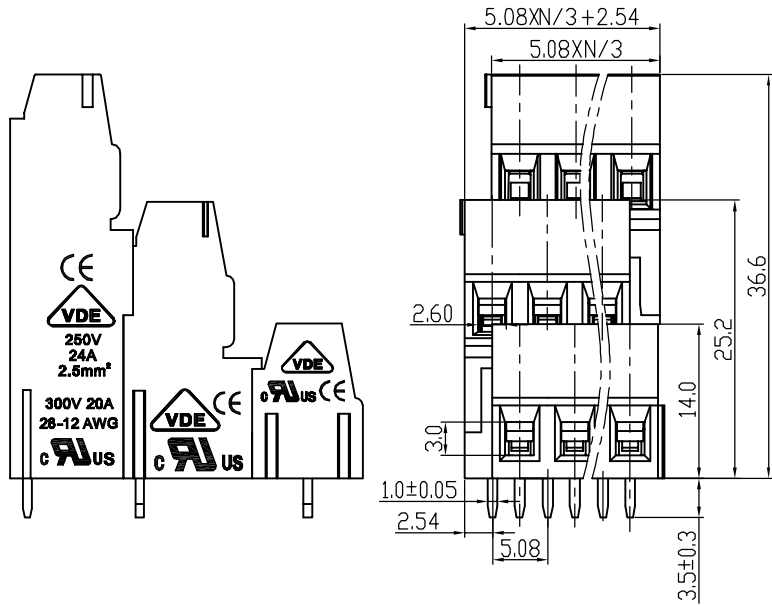

SECTION A-A

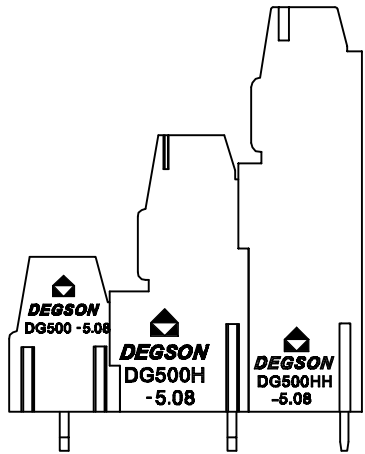

8	DG128 Cage	X000000020 (H)	Δ	XX	Brass	Ni plated
7	DG128 "Screws	S000001460 (H)	Δ	XX	Steel	Cr ³⁺ Zn
6	DG500HH-Pin header	4060B00010 (H)	Δ	XX/3	Brass	SnCe plated
5	DG500H-Pin header	4038B00010 (H)	Δ	XX/3	Brass	SnCe plated
4	DG128-Pin header	4027B00010 (H)	Δ	XX/3	Brass	SnCe plated
3	DG500HH-5.08 Housing	4060A0Y (XX/3) A (H)	Δ	1	PA66	UL94V-0
2	DG500H-5.08 Housing	4038A0Y (XX/3) A (H)	Δ	1	PA66	UL94V-0

1	DG500-5.08-Housing	4036A0Y (XX/3) A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div><div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div><div>NAME DG500A3-5.08-XXP-1Y-00A(H)</div><div>DRAWING NO. DG500A3-5.08-E01 /PART NO.</div><div>DO NOT SCALE DRAWING</div><div>SHEET 1 OF 1</div></div>					