
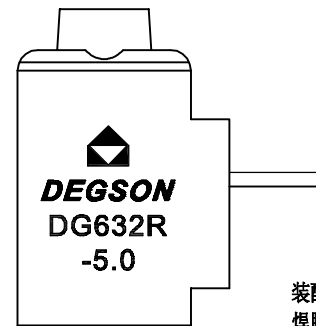



- Notes:
- 1. Pitch: 5.0mm, Poles: 2-20P
  - 2. Rated voltage/current: UL 300V/15A  
VDE 250V/24A
  - 3. Operation temperatures: -40℃~+105℃
  - 4. Withstanding Voltage: AC2000V/1min
  - 5. Insulation Resistance: 1000MΩ/DC500V
  - 6. Wire Range: 28~12AWG, 0.5~2.5mm<sup>2</sup>
  - 7. Max. Torque Value: M2.5, 4.08kgf.cm
  - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		图面修改	LIN	01/28/08*
2		增加CE、UL刻字	LJH	03/20/08*
3		增加VDE刻字	Zengy	07/16/08*
4	10-0211	螺丝料号由“S0000002050”改为“S0000001390”	Jinbai.Lan	09/02/10*
5	10-0290	改善螺丝顶出	Gary.H	09/02/10*

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

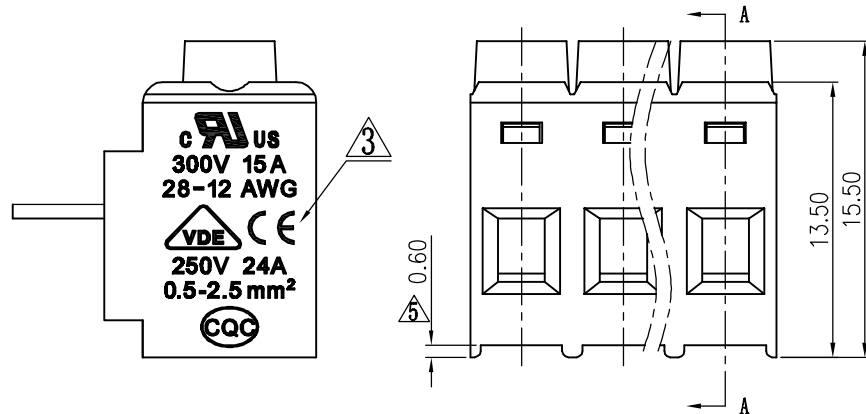

装配时  
焊脚防滑印朝下

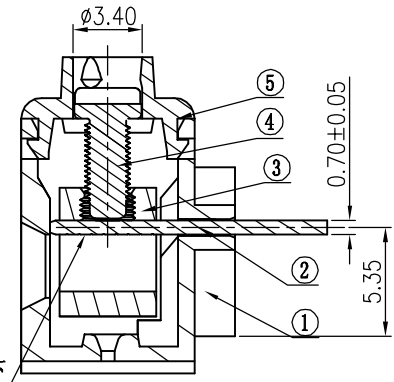

SECTION A-A

5	DG632-5.0-Cover	4085C0YXXA (H)	1	PA66	UL94V-0
4	DG332 "M2.5 Screw	S000001390 (H)	XX	Steel	Cr <sup>3</sup> Zn
3	DG128-Cage	X000000020 (H)	XX	Brass	Ni plated
2	DG632R-5.0-Header	4086B00010 (H)	XX	Brass	SnCe

1	DG632R-5.0-Housing	4086A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 03/22/07*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM	±	CHKD			
.0 ±	±	DATE			
.00 ±	±	APPVL			
.000 ±	±	DATE	NAME		
ANGLES ± 1°		MATERIAL :		DG632R-5.0-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		G.E :		DRAWING NO. DG632R-5.0-E01	
		FINISH:		/PART NO.	
		SCALE :		DO NOT SCALE DRAWING	
			SHEET 1		OF 1