

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Torque value : M4 , 10.6Lb.in
- 2.Wire range : 24~6AWG

IEC Standard





- 1.Torque value : M4 , 1.2N·m
- 2.Wire range : 0.2~10mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.00mm, Poles : N=01~XXP
- 3.Stripping length : 12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					□	□
TO	Over	Over	TO	Over	Over	Over	Over	0.1/10	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6.RoHS Compliance

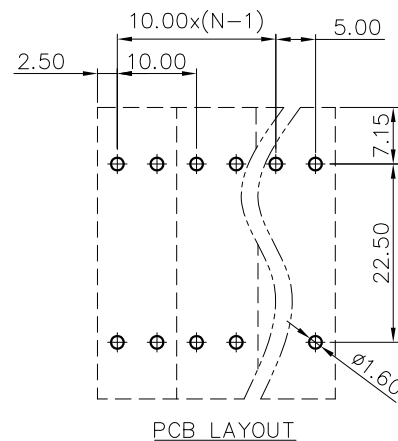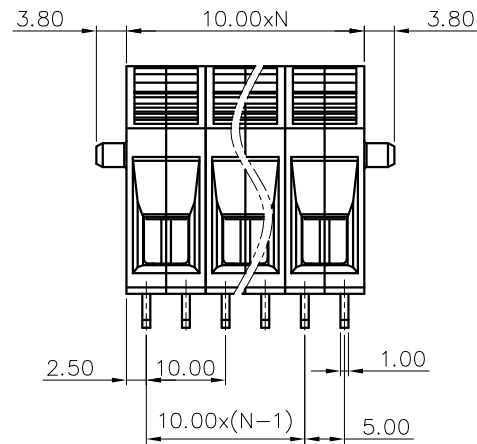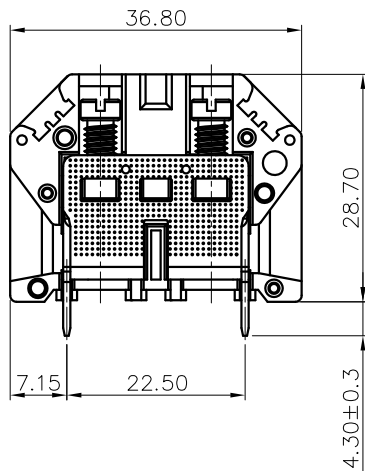

PS10-PE - XXP - 1C - 00A (H)
(Series No.) (Poles)(Single Pitch) (Color):C.(Yellow and green)
(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				PS10-PE-XXP-1C-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET		1/1
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	