

## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

## NOTES1:

UL Standard

1.Torque value : M4 , 10.6Lb.in

2.Wire range : 24~6AWG

IEC Standard

1.Torque value : M4 , 1.2N·m

2.Wire range : 0.2~10mm<sup>2</sup>

## NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 10.00mm, Poles : N=01~XXP





3.Stripping length : 12mm

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	□
TO	Over	TO	Over	TO	Over	TO	Over	0.1/10		
6	10	10	24	30	60	100	150	∠		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			

6.RoHS Compliance

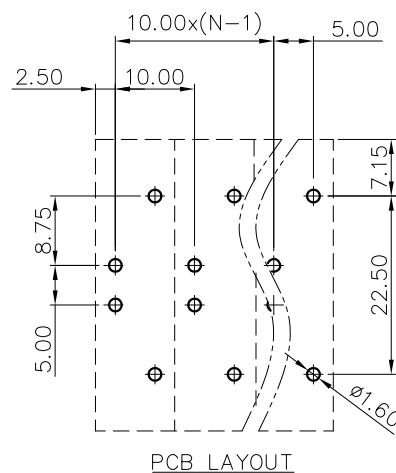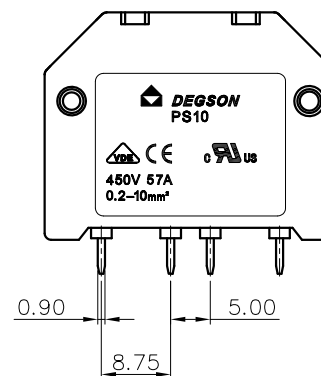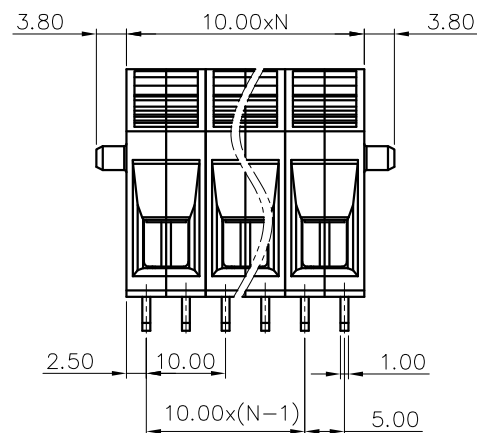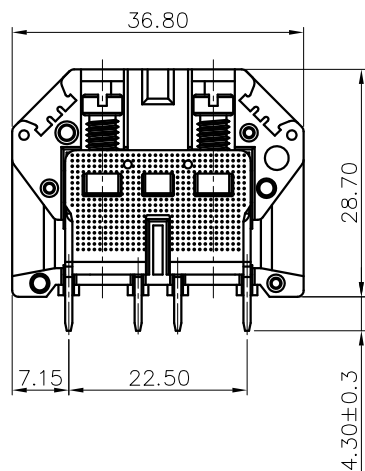

PS10-PE - XXP - 1C - 10A (H)  
(Series No.) (Poles) (Single Pitch) (Color):C.(Yellow and green)  
(RoHS)  
10A-(Customer Request)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: PS10-PE-XXP-1Y-10A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET	1/1

MM  
(INCH)

SCALE

1:1