
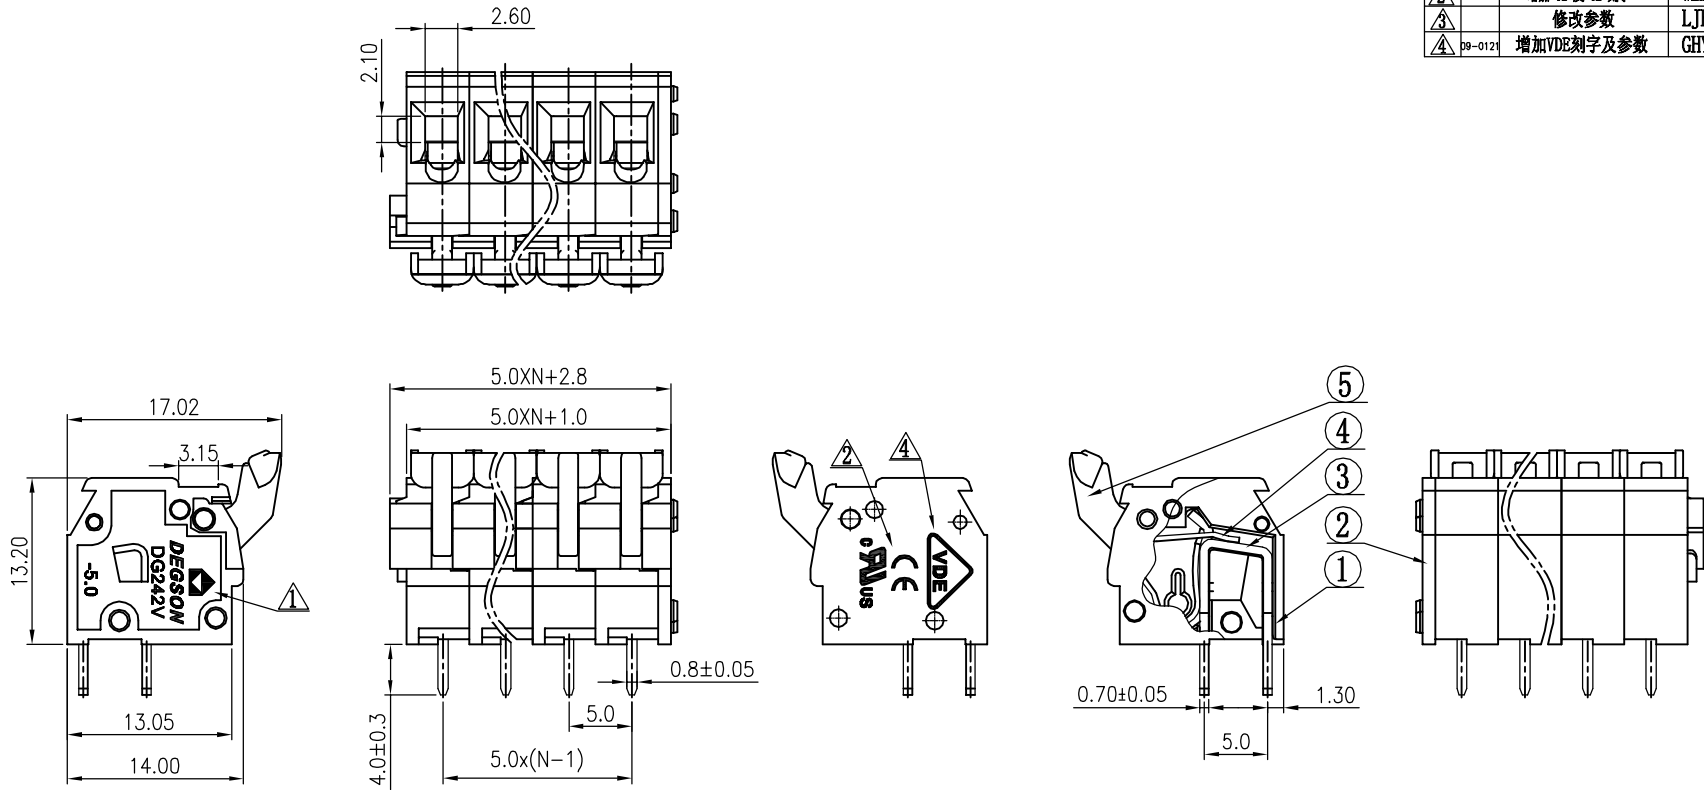


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
⚠		3024D0901A(H)→3024D1701A(H) 增加“DEGSON”及品名刻字	YeJ	04/14/07	
⚠		增加“UL”及“CE”刻字	WLM	09/09/08	
⚠		修改参数	LJH	12/16/08	
⚠	09-012	增加VDE刻字及参数	GHY	11/23/09	



- Notes:
- Pitch:5.0mm ,Poles:XXP
 - Rated voltage/current:UL 300V/15A
VDE 450V/17A ⚠
 - Operation temperatures:-40℃~+105℃
 - Withstanding Voltage:AC2000V/1min
 - Insulation Resistance:5000MΩ/DC1000V
 - Wire Range:28~12AWG, 0.2~2.5mm²
 - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	DG242V-Button	⚠3024D1701A (H)	XX	POM	UL94HB		
4	DG242V-Shrapnel	X000000990 (H)	XX	Stainless steel			
3	DG242V-Pin header	3024B00010 (H)	XX	Phosphor bronze	SnCe Plated		
2	DG242V-Cover	3024C0Y01A (H)	1	PA66	UL94V-0		
1	DG242V-5.0-Housing	3024A0Y01A (H)	XX	PA66	UL94V-0		
ITEM		NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTO ExpsAny	DATE 04/11/06	<div>DEGSON ®</div> <div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME DG242V-5.0-XXP-1Y-00A(H)</div> <div>DRAWING NO. DG242V-5.0-E01 /PART NO.</div> <div>DO NOT SCALE DRAWING</div>		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			
			MFO	DATE			
			APPVL	DATE			
	MM		MATERIAL :		G.E : FINISH : SCALE : 1:1		
	.0 ±						
	.00 ±						
	.000 ±						
	ANGLES ± 1°				SIZE A3 REV T4 11/23/09		
							
THIRD ANGLE PROJECTION				SHEET 1 OF 1			