

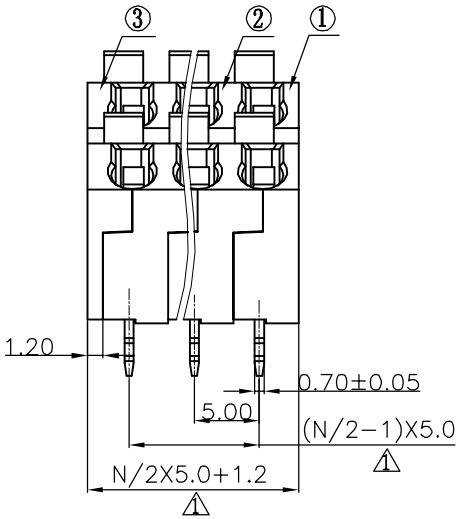
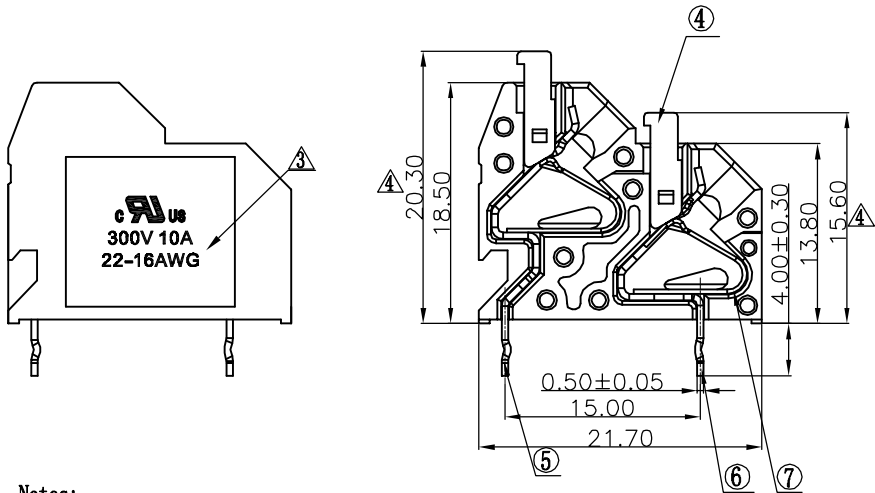



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
⚠		线数变更:改为每个脚代表一线	AheadJu	11/30/07
⚠		品名、料号增加环保标示“(H)”	LJH	12/08/07
⚠		增加UL刻字	CSX	02/25/08
⚠		工程变更修改高度尺寸	WLM	11/26/08



Notes:

1. Pitch:5.0mm ,Poles:XXP
2. Rated voltage/current:UL 300V/10A  
IEC 250V/17.5A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:16~22AWG, 1.5mm<sup>2</sup>
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

7	DG250T-5.0-spring	X000001460(H)	XX	⚠	stainless steel	
6	DG250T-5.0-short pin	3019B00020(H)	XX/2	⚠	Copper	Snce plated
5	DG250T-5.0-long pin	3019B00010(H)	XX/2	⚠	Copper	Snce plated
4	DG250T-5.0-button	3019D0Y01A(H)	XX	⚠	PA66	UL94V-0
3	DG250T-5.0-left cover	3019C0Y01A(H)	1		PA66	UL94V-0
2	DG250T-5.0-housing	3019A0Y01A(H)	XX/2-1	⚠	PA66	UL94V-0

1	DG250T-5.0-right cover	3019C0Y01B(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div><div>DEGSON</div><div>NAME DG250T-5.0-XXP-1Y-00A(H)</div><div>DRAWING NO. DG250T-5.0-E01</div><div>DO NOT SCALE DRAWING</div></div> <div><div>DEGSON</div><div>NAME DG250T-5.0-XXP-1Y-00A(H)</div><div>DRAWING NO. DG250T-5.0-E01</div><div>DO NOT SCALE DRAWING</div></div>					
SHEET 1 OF 1					