

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 600V / 65A
- 2.Torque Value : M4 , 10.53Lb.in
- 3.Wire Range : 24~6AWG

IEC Standard

- 1.Rated Voltage/Current : 1000V / 57A
- 2.Torque Value : M4 , 1.2N·m
- 3.Wire Range : 0.2~10mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 11.25mm, Poles : N=02P
- 3.Stripping length : 10~12mm
- 4.Withstanding Voltage : AC3500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	□
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		





7.RoHS Compliance

TSC 10 - 02P - 1Y - 00A (H)

(Series No.) (Poles) (Single Pitch) (Color) (RoHS)

00A-(Standard)

(Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

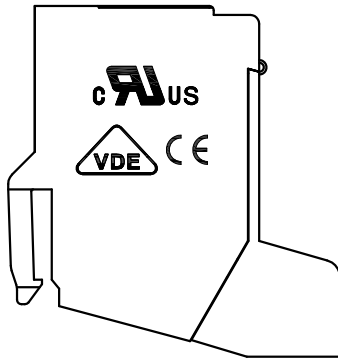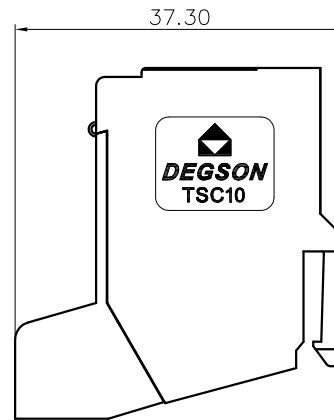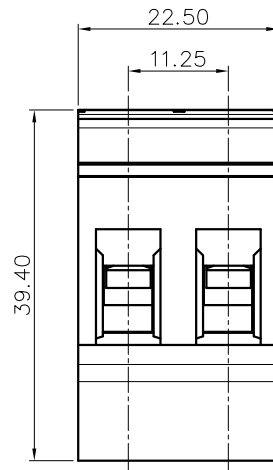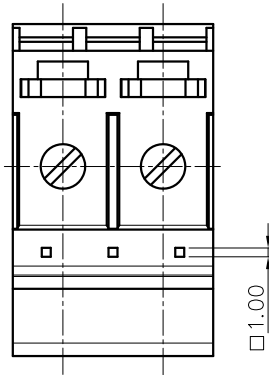

DETACHED LISTS	PART NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: /	NAME: TSC 10-02P-1Y-00A(H)		
	CHKD: /	TITLE: CUSTOMER DRAWING		
	DRFT: /	REV: DO		
THIRD ANGLE PROJECTION		DRAWING NO.: /	SHEET 1/1	DO
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1