


DG306-5.0

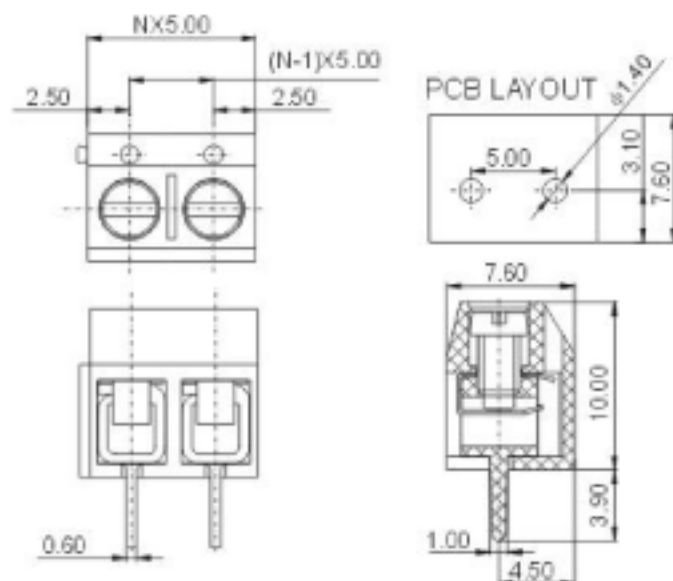

APPROVAL	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-14AWG	1.5mm ²
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-30℃~+120℃	
Strip length	5-6mm	
Dimensions		
Pitch	5.0mm(.197")	
Poles	2P,3P-24P	
Material		
Housing	PBT,UL94V-0	
Screws	M2.5,steel, Cr ³⁺ Zn-plated	
Pin header	Brass,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

DG306-5.0	-		P	-	1	-	X	X	X
							Customer Request		
Series number		No. of pole					Color		
							1 Grey	4 Green	7 True Paint
							2 Blue	5 Orange	8 Yellow
							3 Black	6 Red	9 White

mm (INCH)	DEGSON [®] DEGSON ELECTRONICS CO., LTD.
NAME	DG306-5.0