
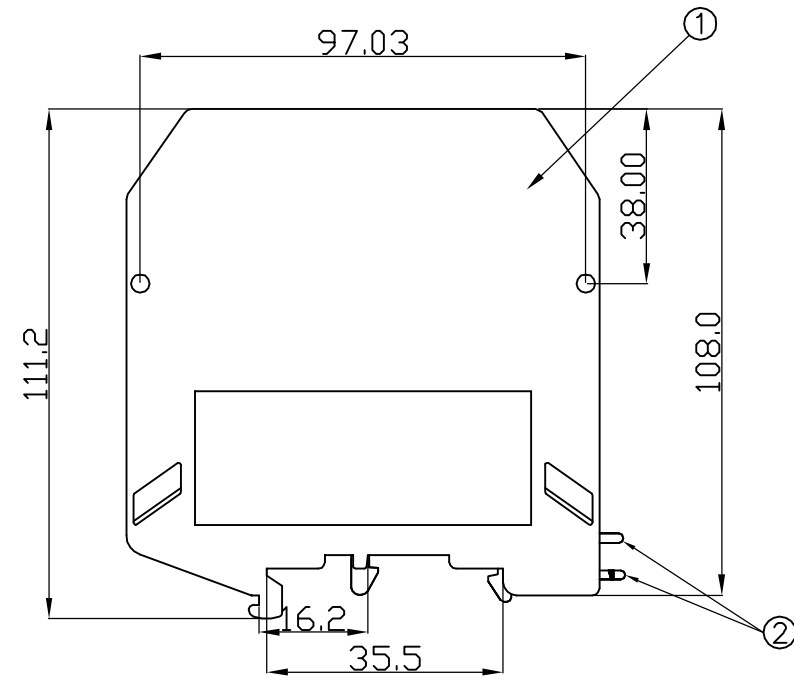
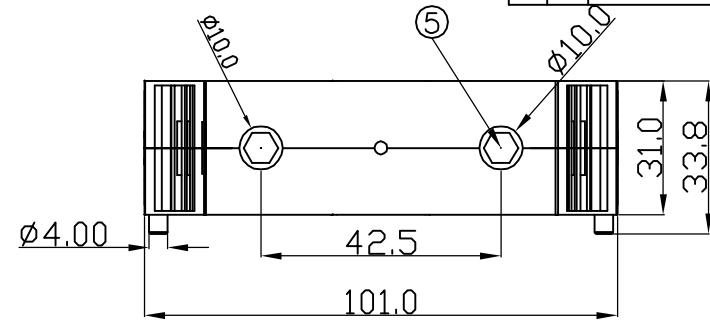
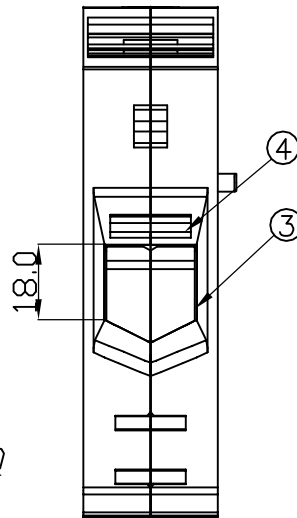


Notes:

1. Rated current:309A
2. Rated voltage:1000V
3. Operation temperatures:-40° C~+105° C
4. Wire Range:50-100mm² 2~300AWG
5. Max. Torque Value:40.80kgf.cm
6. Undimensioned Tolerances:



Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10	over 10	over 6	over 30	over 90	over 200		—
to 6	to 10	to 24	to 6	to 30	to 90	to 200	to 480		∩
									∇
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10	

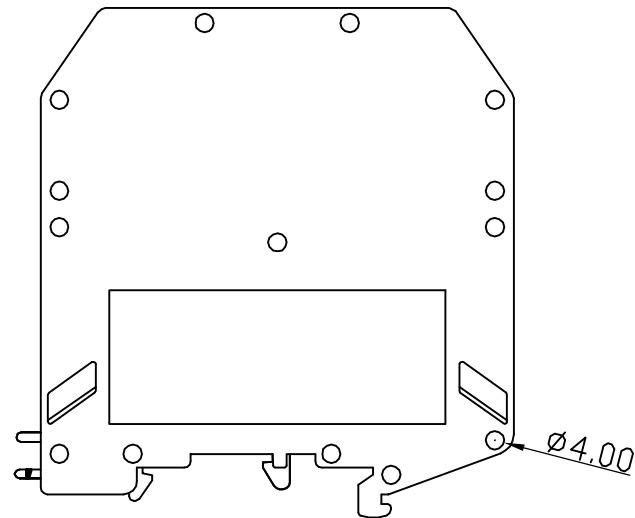

REVISION RECORD

REV	ECO	DESCRIPTION	DRFT	DATE

5	PC 150 M10 Screw	2	Steel	Ni Plated
4	PC 150-Contact	1	Brass	Ni Plated
3	PC 150-Hardware	2	Iron	Ni Plated

2	PC 150-Slip Component		1	PA66	UL94V-0
1	PC 150 Housing		1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETAILED LISTS	<div>MM (INCH)</div>		DFTD ZYH	DATE 11/07/07	<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div> <div>NAME PC150-01P-1Y-00A</div> <div><div>DRAWING NO. PC150-E01</div><div>SIZE A4</div><div>REV TO 11/07/07</div></div> <div><div>DO NOT SCALE DRAWING</div><div>SHEET 1 OF 1</div></div>
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
			MFD	DATE	
			APPVL	DATE	
	MATERIAL :				
	ANGLES ± 1°		G.E :		
	<div></div>		FINISH:		
	THIRD ANGLE PROJECTION		SCALE : 1:1		