


Section A-A

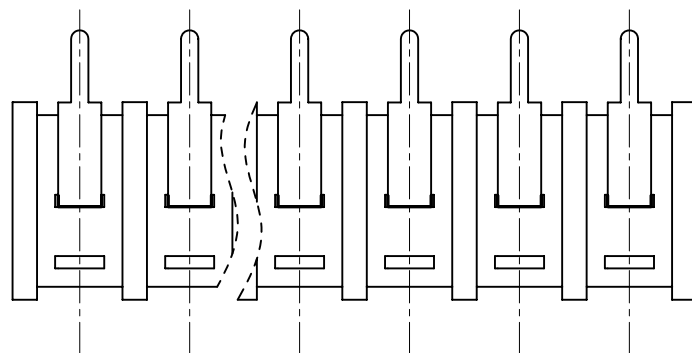


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		出脚依实物及理论值由5.00±0.10改到4.75±0.30	CSX	06/07/05
2		图面更新	CSX	07/20/06
3		增加UL刻字	YeJ	11/06/06
4		品名、料号增加环保标识“(H)”	YeJ	12/08/07

## NOTES:

1. Pitch: 7.62mm
2. Rated current: 15A
3. Rated voltage: 300V
4. Operation temperatures: -40° C ~ +105° C
5. Insulation Withstand Voltage: AC2000V/1min
6. Insulation Resistance: 500MΩ/DC500V
7. Wire Range: 22~14AWG
8. Max. Torque: 5.10kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over	over	
6	6	10	10	30	60	100	150		—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	◇



3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25R-Pin Header	5001B00060 (H)	XX	Brass	SnCe
1	DG25R-B-Housing	5001A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 03/03/04"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±				
	.000 ±	MATERIAL :		NAME DG25R-B-XXP-1Y-00A(H)	
	ANGLES ± 1°	G.E :		DRAWING NO. DG25R-E01	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	