

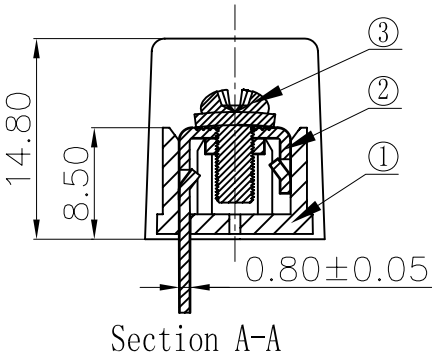




REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
⚠		图面更新	C.SX	07/20/06	
⚠		增加UL刻字	YeJ	11/06/06	

- NOTES:
- 1. Pitch:7.62mm
 - 2. Rated current:15A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/1Min
 - 6. Insulation Resistance:500MΩ /DC500V
 - 7. Wire Range:22~14AWG
 - 8. Max. Torque:5. 10kgf. cm
 - 9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 6 to 10	over 10 to 30	over 30 to 90	over 90 to 200	over 200 to 480		—
	±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

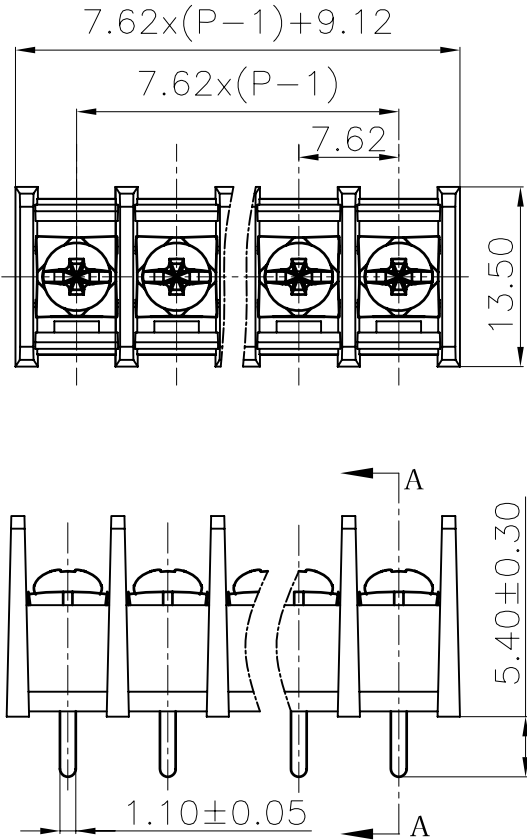

3	3*6 (6*6) "—"bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25S-Pin Header	5001B00090 (H)	XX	Brass	SnCe

1	DG25S Housing		5001A0YXXA (H)		1	PA66	UL94V-0	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Home	DATE 03/07/06"		<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPVL	DATE				
	MM		NAME DG25S-B-XXP-1Y-00A(H)					
	.0 ±	±						
	.00 ±	±						
	.000 ±	±	MATERIAL :					
	ANGLES ± 1°		G.E :		DRAWING NO. DG25S-E04		SIZE	REV
			FINISH :		/PART NO.		A3	T2 11/06/06"
SCALE : 1:1			DO NOT SCALE DRAWING					