



Section A-A



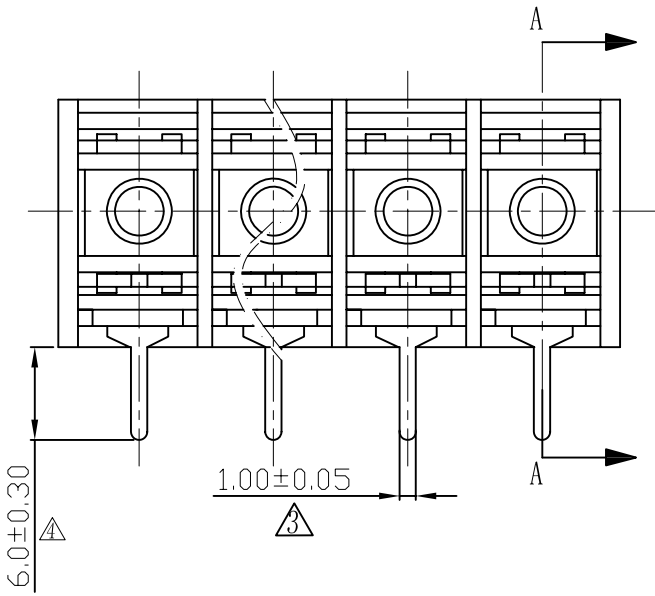


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
2		产品名称由DG36B变更为DG36R	CSX	02/18/06"
3		增加0.1刻字, 针宽由1.1±0.05改为1.0±0.05	Ye j	12/16/06"
4		出脚由5.6±0.3改为6.0±0.3	Ye j	02/02/07"
5		品名、料号增加环保标识“(H)”	Ye j	12/08/07"

- Notes:
- 1. pitch: 8.25mm
  - 2. Rated voltage: 300V
  - 3. Rated current: 20A
  - 4. Insulation resistance: 500MΩ/500V
  - 5. Withstanding voltage: AC2000V/1Min
  - 6. Wire range: 22-12AWG 1.5mm<sup>2</sup>
  - 7. Temp. Range: -40° C~+105° C
  - 8. Torque: 5.1Kg. cm.
  - 9. Undimensioned Tolerances:

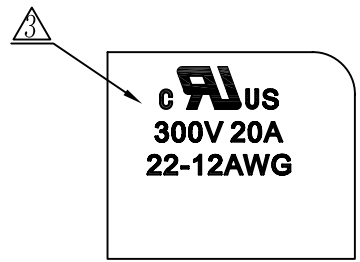Pitch range in mm		Nominal dimension range in mm		Tolerance	
to 6	over 6 to 10	to 24	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.3	±0.5	±0.7



3	DG36 level Pin header	5011B00030(H)	XX	Brass	SnCe		
2	M3*6(6.5*6.5)bright and big cover screws	S000000490(H)	XX	Steel	Ni plated		
1	DG36R Housing	5011A0YXXA(H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES		
DETACHED LISTS	 MM CINCH		DFTD Zhujun		DATE 03/19/04"		
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE		
			MFD		DATE		
			APPVL		DATE		
	MM		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD				
	.0 ±						NAME  DG36R-B-XXP-1Y-00A(H)
	.00 ±						
	.000 ±						
	ANGLES ± 1°		G.E :		DRAWING NO. DG36R-E01	SIZE A3	REV T5 12/08/07"
			FINISH:				
THIRD ANGLE PROJECTION		SCALE : 1:1					
DO NOT SCALE DRAWING			SHEET 1 OF 1				