


- NOTES:
1. Pitch: 8.25mm , Poles: 2P-26P
 2. Rated voltage/current: UL 300V/20A
IEC 450V/32A
 3. Operation temperature: -40° C ~+105° C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 500MΩ /DC500V
 6. Wire Range: 22~12AWG; 4mm²
 7. Max. Torque Value: M3, 5.10Kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6 to 6	over 10 to 24	over 30 to 30	over 60 to 60	over 100 to 100	over 150 to 150			
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

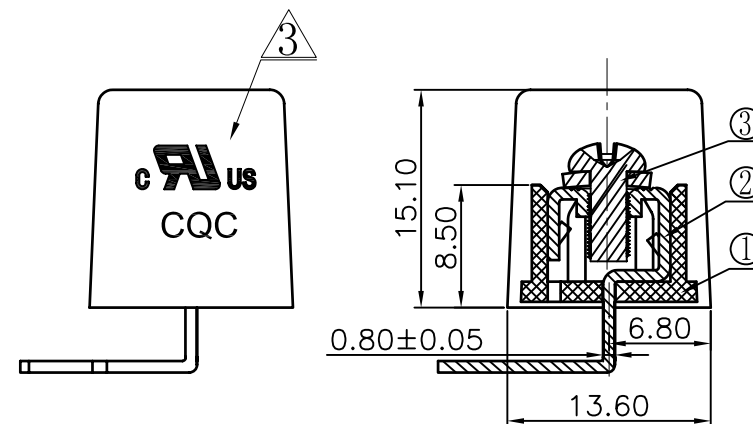

SECTION A-A

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25R-Pin Header	5001B00060 (H)	XX	Brass	SnCe
1	DG35-Housing	5002A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 03/03/04"	DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
		MATERIAL :			
	MM .0 ± .00 ± .000 ±	± ± ±		NAME DG35R-B-XXP-1Y-00A(H)	
	ANGLES ± 1°	G.E :		DRAWING NO. DG35R-E01	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	