


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	12/01/06
△	ECN10-0264	更新图面	ZXX	08/17/10

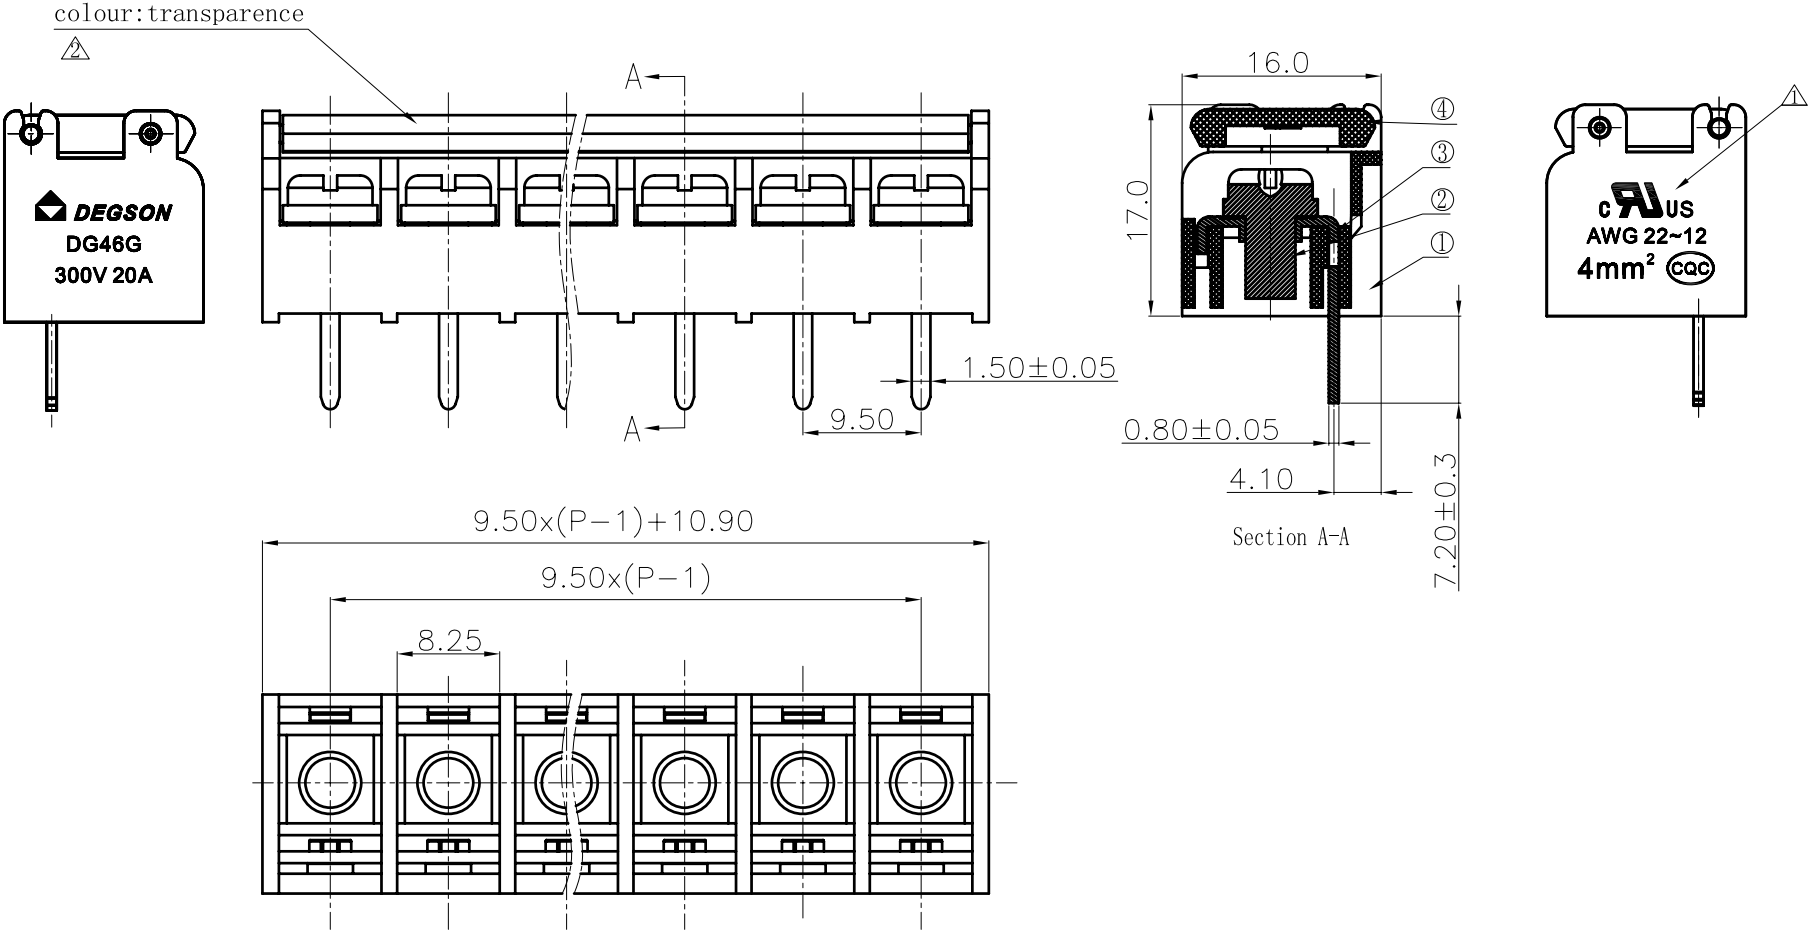

- NOTES:
1. Pitch: 9.5mm, Poles: 2p-12p;
 2. Rated: 300V/20A; △
 3. Temp. Range: -40° C ~ +105° C;
 4. Withstand Voltage: AC2000V/1min;
 5. Wire Range: 22-12AWG;
 6. Insulation Resistance: 500MΩ/DC500V;
 7. Max. Torque Value: 12.24Kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm				Nominal dimension range in mm				
to	over	to	over	to	over	to	over	
6	10	10	24	6	30	90	200	○
6	10	24	6	30	90	200	480	□
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

4	DG46G-B-Cover	5013C07XXA(H)	1	PC	UL94V-2
3	DG46GS Pin header	5013B00040(H)	XX	Brass	SnCe
2	M4*8 (7.5*7.5) Bright screws	S000000570(H)	XX	Steel	Ni plated

1	DG46G-B-Housing	5013A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Home	DATE 04/20/06*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
		MATERIAL :			
	MM	ANGLES ± 1°	G.E :	NAME DG46GS-B-XXP-1Y-00A(H)	
	.0 ±			DRAWING NO. DG46GS-E08	
	.00 ±			/PART NO.	
	.000 ±			SCALE : 1:1	
	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING		SHEET 1 OF 1	