

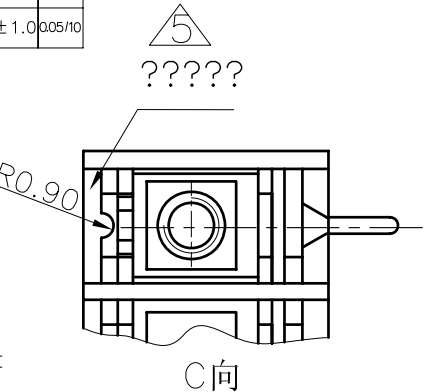
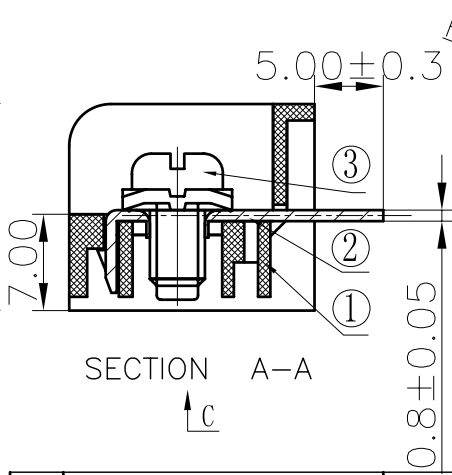


NOTE:  
1. Pitch: 9.5mm , Poles: 2p-26p;  
2. Rated: 300V/20A;  
3. Temp. Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ ;  
4. Withstand Voltage: AC2000V/1min;  
5. Wire Range: 22-12AWG;  
6. Insulation Resistance:  $500\text{M}\Omega / \text{DC500V}$ ;  
7. Max. Torque Value: 12.24Kgf.cm  
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
$\pm 0.10$	$\pm 0.15$	$\pm 0.25$	$\pm 0.2$	$\pm 0.3$	$\pm 0.5$	$\pm 0.7$	$\pm 1.0$	$0.05/10$		

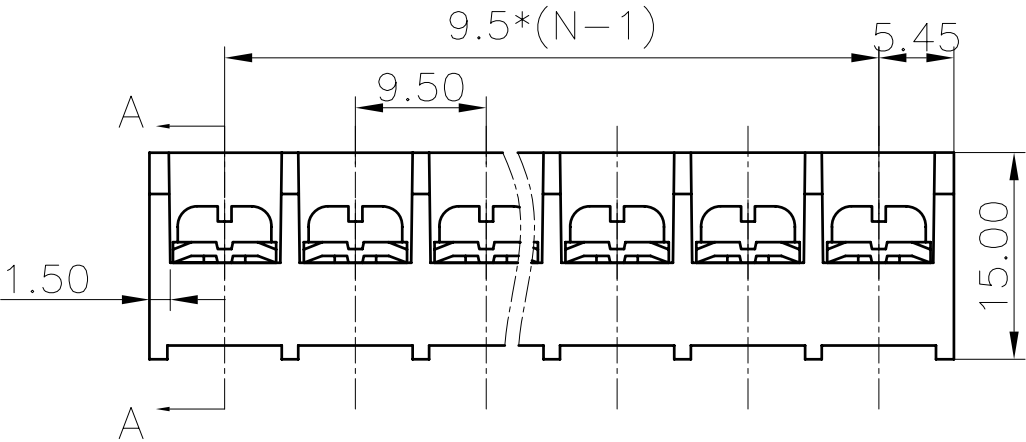

3	M4*8 (7.5*7.5) bright screws	S000000570(H)	XX	Steel	Ni plated
2	DG46R level Pin header	5012B00010(H)	XX	Brass	SnCe

1	DG46R-B-Housing	5012A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG46R-B-XXP-1Y-00A(H)					
DRAWING NO. DG46R-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					