


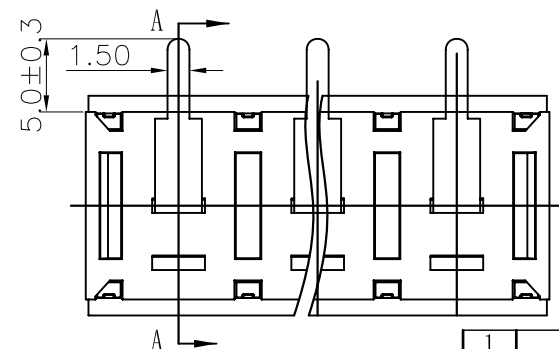
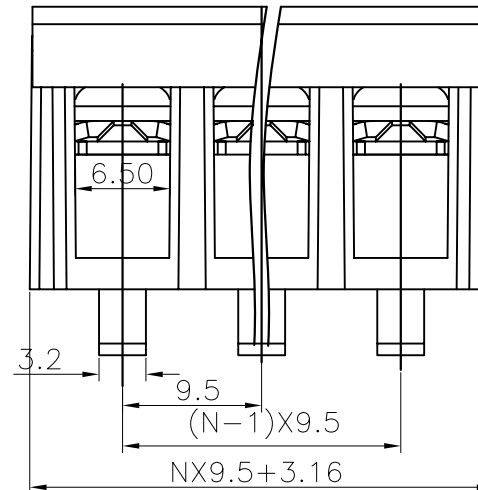
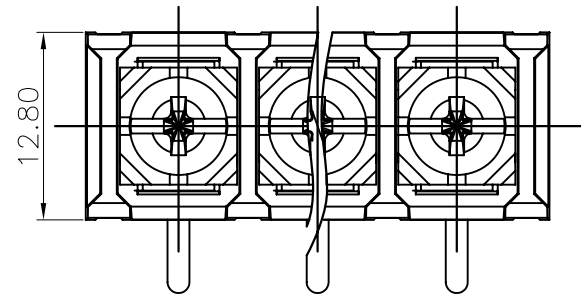


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	CSX	03/16/07	
△		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

Notes:

1. Pitch: 9.5mm, Poles: 2-22P
2. Rated current: 20A
3. Rated voltage: 300V
4. Operation temperatures: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
5. Insulation Withstand Voltage: AC2000V/Min
6. Insulation Resistance: $500\text{M}\Omega/\text{DC}500\text{V}$
7. Wire Range: 22~12AWG
8. Max. Torque Value: 12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	over	to	over	over	over	over	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	250 to 300	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	$0.05/10$	

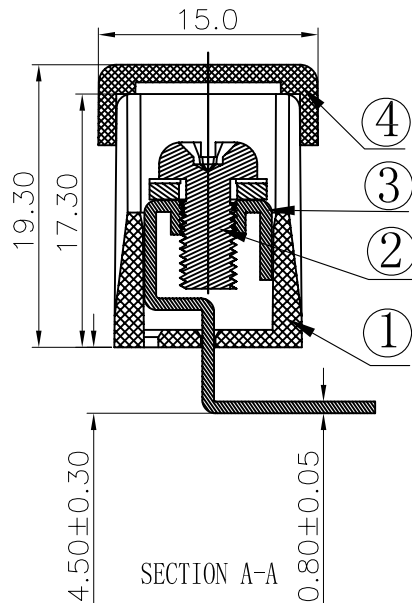

4	DG48-Cover	5051C07XXA(H)	1	PC	
3	DG58R Pin header	5008B00060(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5) bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG48-B-Housing	5051A0YXXA(H)	1	PA66+23%GF	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Zhuwm		DATE 01/13/06"	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MM		NAME DG48R-B-XXP-1Y-00A(H)			
	.0 ±	±				
	.00 ±	±				
	.000 ±	±				
	ANGLES ± 1°		G.E :		DRAWING NO. DG48R-E02	
		FINISH :		/PART NO.		
		SCALE : 1:1		DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION				SHEET 1 OF 1		
				SIZE A3		
				REV T2 12/08/07		