


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

Notes:

1. Pitch:10mm ,Poles:2-22P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500M Ω /DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 150	150 to 150	0.05/10
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	

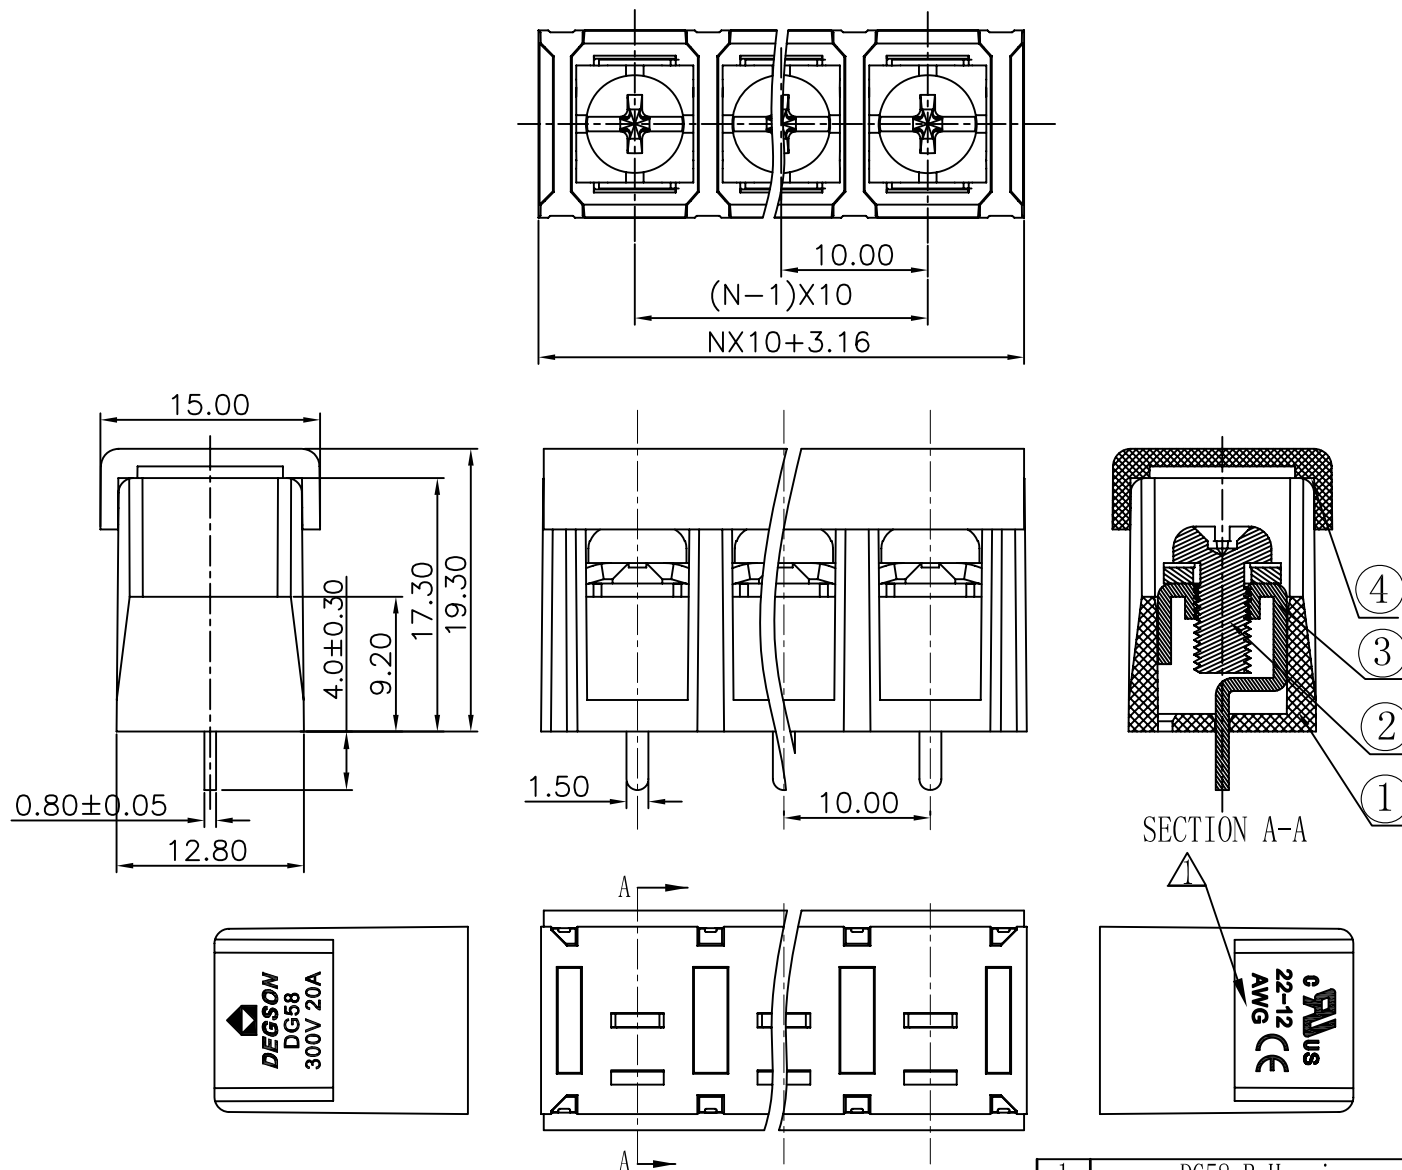

4	DG58-Cover	5008C07XXA(H)	1	PC	
3	DG58C Pin header	5008B00010(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG58-B-Housing	5008A0YXXA(H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div> <div> <div>MM (INCH)</div> <div>TOLERANCES EXCEPT AS NOTED</div> <div> <div>MM</div> <div>.0 ±</div> <div>.00 ±</div> <div>.000 ±</div> </div> <div>±</div> <div>±</div> <div>±</div> </div> <div> <div>ANGLES ± 1°</div> <div>THIRD ANGLE PROJECTION</div> </div> </div> <div> <div>DFTO Zhuwm</div> <div>CHKD</div> <div>MFO</div> <div>APPVL</div> <div>G.E</div> <div>FINISH</div> <div>SCALE : 1:1</div> </div> <div> <div>DATE 01/13/06"</div> <div>DATE</div> <div>DATE</div> <div>DATE</div> <div>MATERIAL :</div> <div>DO NOT SCALE DRAWING</div> </div>					
<div> <div>DEGSON®</div> <div>宁波高正电子有限公司</div> <div>DEGSON ELECTRONICS CO., LTD</div> </div> <div> <div>NAME</div> <div>DG58C-B-XXP-1Y-00A(H)</div> </div> <div> <div>DRAWING NO. DG58C-E02</div> <div>SIZE A3</div> <div>REV T2</div> </div>					
SHEET 1				OF 1	