


Metal Film Resistors

High Power & Flame-Proof Type

Ultra Miniature Style [FMP Series]

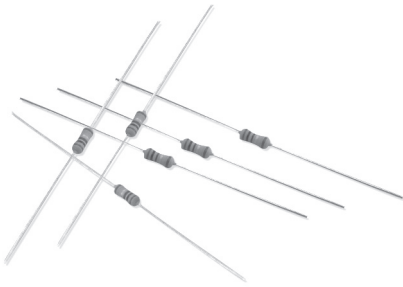

INTRODUCTION

The FMP Series Metal Film High Power Resistors are manufactured using a vacuum sputtering system to deposit multiple layers of mixed metal alloys and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer; tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of pink color lacquer.


FEATURES

Power Rating	1/2W, 1W, 2W, 3W
Resistance Tolerance	$\pm 1\%$, $\pm 5\%$
T.C.R.	$\pm 100\text{ppm}/^\circ\text{C}$
Flameproof Multi-layer Coating Meets	UL-94V-0
Flameproof Feature Meets Overload Test	UL-1412

DERATING CURVE

For resistors operated in ambient temperatures above 70°C , power rating must be derated in accordance with the curve below.

Rated Load (%)

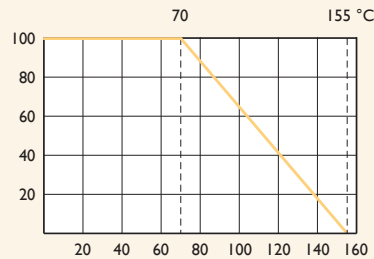

Ambient Temperature ($^\circ\text{C}$)

DIMENSIONS

Unit: mm



STYLE	DIMENSION			
Ultra Miniature	L	ϕD	H	ϕd
FMP-50	3.4 ± 0.3	1.9 ± 0.2	28 ± 2.0	0.45 ± 0.05
FMP100	6.3 ± 0.5	2.4 ± 0.2	28 ± 2.0	0.55 ± 0.05
FMP200	9.0 ± 0.5	3.9 ± 0.3	26 ± 2.0	0.55 ± 0.05
FMP3WS	11.5 ± 1.0	4.5 ± 0.5	35 ± 2.0	0.8 ± 0.05
FMP300	15.5 ± 1.0	5.0 ± 0.5	33 ± 2.0	0.8 ± 0.05

Note:

ELECTRICAL CHARACTERISTICS

STYLE	FMP-50	FMP100	FMP200	FMP3WS	FMP300
Power Rating at 70°C	1/2W	1W	2W	3W	
Maximum Working Voltage	200V	350V	500V		750V
Maximum Overload Voltage	400V	600V	700V		1,000V
Voltage Proof on Insulation	300V	500V			
Resistance Range	1Ω - 4M7Ω & for E24 & E96 series value				
Operating Temp. Range	-55°C to +155°C				
Temperature Coefficient	±100ppm/°C , ±50ppm/°C (FMP-50 & FMP100 types, R ≥ 10RΩ)				

Note: Special value is available on request

ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	IEC 60115-1 4.13	2.5 times RCWV for 5 sec. (Not more than maximum Overload Voltage)	±1.0%+0.05Ω
Voltage Proof on Insulation	IEC 60115-1 4.7	In V-Block for 60 sec., test voltage as above table	No Breakdown
Temperature Coefficient	IEC 60115-1 4.8	Between -55°C to +155°C	By type
Insulation Resistance	IEC 60115-1 4.6	in V-block for 60 Sec.	>1,000MΩ
Solderability	IEC 60115-1 4.17	245±5°C for 3±0.5 Sec.	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5±0.5 Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	≥2.5kg (24.5N)
Periodic-pulse Overload	IEC 60115-1 4.39	4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)	±1.0%+0.05Ω
Damp Heat Steady State	IEC 60115-1 4.24	40±2°C, 90-95% RH for 56 days, loaded with 0.1 times RCWV	±2.0%+0.05Ω
Endurance at 70°C	IEC 60115-1 4.25	70±2°C at RCWV (or Umax., Whichever less) for 1,000 Hr. (1.5Hr.on, 0.5Hr. Off)	±2.0%+0.05Ω
Temperature Cycling	IEC 60115-1 4.19	-55°C ⇄ Room Temp. ⇄ +155°C ⇄ Room Temp. (5 cycles)	±1.0%+0.05Ω
Resistance to Soldering Heat	IEC 60115-1 4.18	260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body	±0.25%+0.05Ω
Accidental Overload Test	IEC 60115-1 4.26	4 times RCWV for 1 Min.	No evidence of flaming or arcing

Note: RCWV(Rated Continuous Working Voltage) = $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$ or Max. working voltage listed above, whichever less.

Revision: 2020

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

[FMP100JR-52-12K](#) [FMP100JR-52-220R](#) [FMP100JR-52-3K3](#) [FMP200FRF52-130K](#) [FMP200FRF52-154K](#)
[FMP200FRF52-220R](#) [FMP200FRF52-249R](#) [FMP200FRF52-274K](#) [FMP200FRF52-332K](#) [FMP200FRF52-390K](#)
[FMP200FRF52-715K](#) [FMP200FRF52-75K](#) [FMP200JR-52-180K](#) [FMP200JR-52-1M](#) [FMP200JR-52-200K](#) [FMP200JR-](#)
[52-220K](#) [FMP200JR-52-2K7](#) [FMP200JR-52-390R](#) [FMP200JR-52-470R](#) [FMP300FTF73-100K](#) [FMP300FTF73-100R](#)
[FMP300FTF73-47K](#) [FMP300JR-73-22R](#) [FMP100JR-52-470K](#) [FMP200JR-52-1K2](#) [FMP100JR-52-27K](#)
[FMP300FRF73-1K5](#) [FMP300FRF73-49K9](#) [FMP300FRF73-48K7](#) [FMP300FRF73-100K](#) [FMP300FRF73-6K65](#)
[FMP100JR-52-1K](#) [FMP100JR-52-4R7](#) [FMP100JR-52-22K](#) [FMP100JR-52-22R](#) [FMP100JR-52-47R](#) [FMP200JR-52-](#)
[7K5](#) [FMP200JR-52-820K](#) [FMP100JR-52-270R](#) [FMP100JR-52-2K2](#) [FMP100JR-52-47K](#) [FMP100JR-52-4K7](#)
[FMP200JR-52-39K](#) [FMP100JR-52-100K](#) [FMP200JR-52-22R](#) [FMP200JR-52-4R7](#) [FMP200JR-52-100K](#) [FMP200JR-](#)
[52-4K7](#) [FMP200JR-52-33R](#) [FMP100JR-52-390R](#) [FMP100JR-52-56K](#) [FMP200JR-52-120K](#) [FMP200JR-52-15K](#)
[FMP200JR-52-330R](#) [FMP200JR-52-430R](#) [FMP200JR-52-560R](#) [FMP100JR-52-68R](#) [FMP200JR-52-10K](#) [FMP200JR-](#)
[52-1K5](#) [FMP200JR-52-270R](#) [FMP100JR-52-1M](#) [FMP100JR-52-560R](#) [FMP200JR-52-47K](#) [FMP200JR-52-8K2](#)
[FMP100JR-52-10R](#) [FMP200JR-52-47R](#) [FMP200JR-52-12K](#) [FMP100JR-52-1K5](#) [FMP200JR-52-18K](#) [FMP200JR-52-](#)
[68K](#) [FMP200FRF52-100R](#) [FMP100JR-52-1K2](#) [FMP200JR-52-43R](#) [FMP100JR-52-18K](#) [FMP200JR-52-150K](#)
[FMP100JR-52-180R](#) [FMP100JR-52-82K](#) [FMP200JR-52-120R](#) [FMP100JR-52-16K](#) [FMP200JR-52-22K](#) [FMP200JR-](#)
[52-27R](#) [FMP200JR-52-30K](#) [FMP100JR-52-100R](#) [FMP200JR-52-1K8](#) [FMP100JR-52-150K](#) [FMP100JR-52-270K](#)
[FMP100JR-52-33K](#) [FMP100JR-52-820K](#) [FMP200JR-52-27K](#) [FMP200JR-52-56R](#) [FMP200JR-52-820R](#) [FMP200JR-](#)
[52-18R](#) [FMP200JR-52-150R](#) [FMP200JR-52-180R](#) [FMP200JR-52-2K2](#) [FMP200JR-52-5K1](#) [FMP100JR-52-68K](#)
[FMP200JR-52-220R](#) [FMP200JR-52-270K](#) [FMP100JR-52-180K](#)