
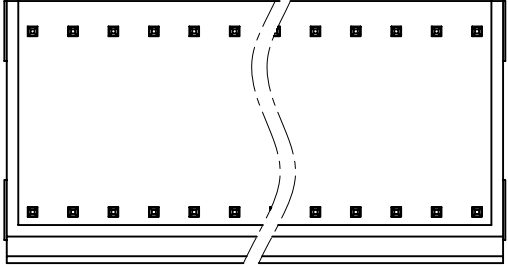
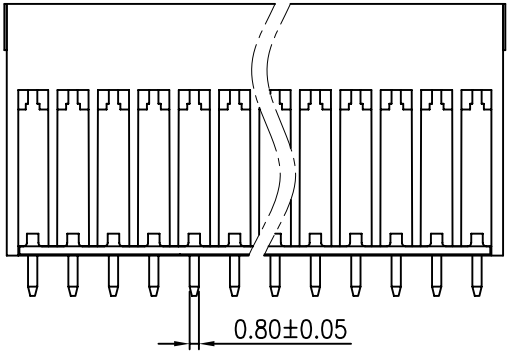


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL, CE刻字	Zengy	09/05/08
△		增加VDE及参数刻字	LJH	02/10/09



- Notes:
- 1. Pitch: 3.5mm , Poles: 4-48P
  - 2. Rated voltage/current: UL 300V/8A  
VDE 250V/7A
  - 3. Operation temperatures: -40℃ ~ +105℃
  - 4. Withstanding Voltage: AC2000V/1min
  - 5. Insulation Resistance: 5000MΩ/DC1000V
  - 6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
		over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	15EDGV/RH-3.5-Cover	1063COYXXA (H)	1	PA66	UL94V-0
2	15EDGVH-Pin	1063B00030 (H)	XX	Brass	SnCe

1	15EDGV/RH-3.5-Housing	1063AOYXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
<div><div>DEGSON</div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div>					
NAME 15EDGVH-3.5-XXP-1Y-00A (H)					
DRAWING NO. 15EDGVH-3.5-E01				SIZE A3	REV T2 02/10/09
/PART NO.				DO NOT SCALE DRAWING	
SCALE : 1:1				SHEET 1	OF 1