
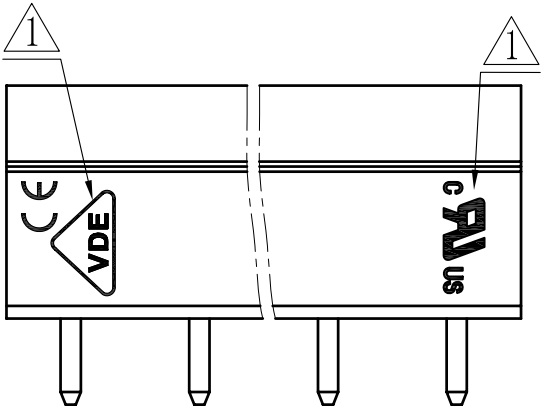



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加VDE, UL, CE刻字	Zengy	01/13/09	

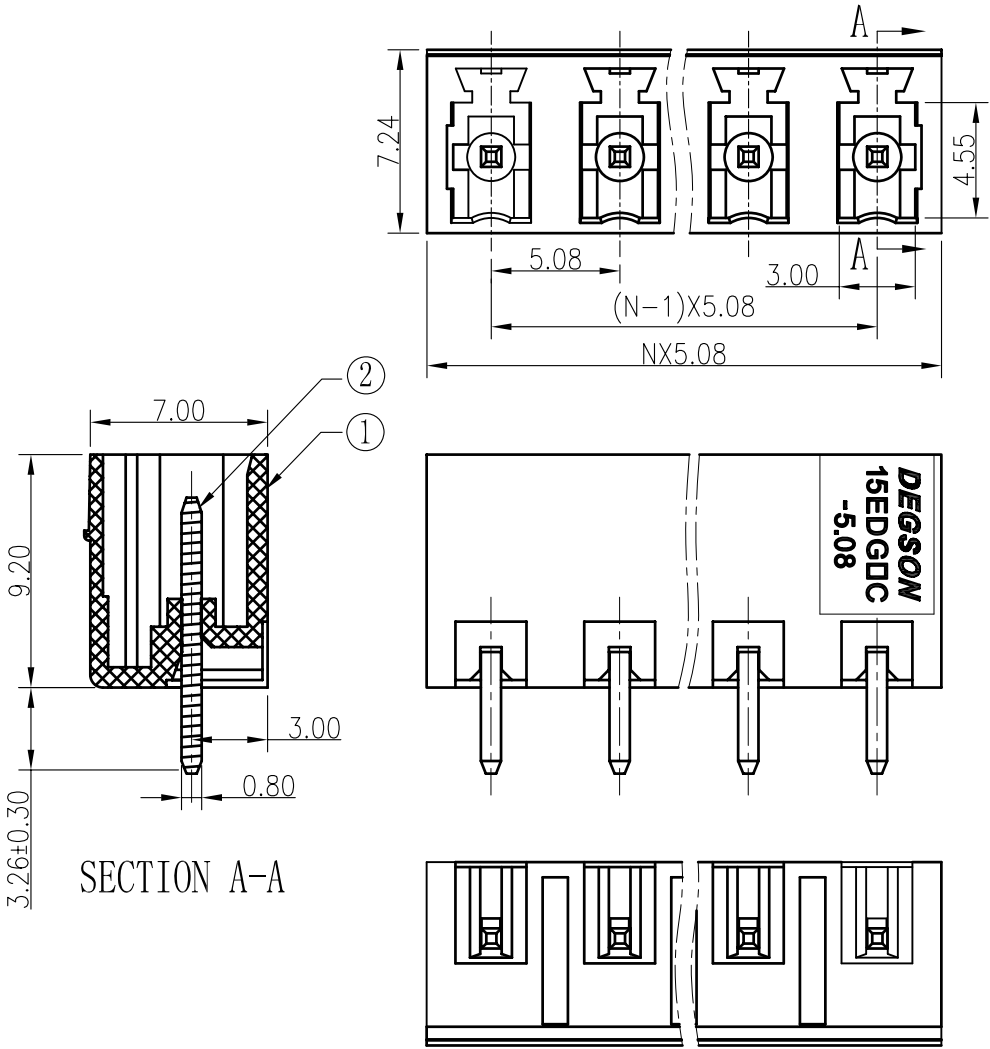

- Notes:
1. Pitch:5.08mm , Poles:2-12P
  2. Rated voltage/current:UL 300V/8A  
VDE 250V/7A
  3. Operation temperatures:-40℃~+105℃
  4. Withstanding Voltage:AC2000V/1Min
  5. Insulation Resistance:5000MΩ/DC1000V
  6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10		over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

2	15EDGV Pin header	1002B00010 (H)	XX	Brass	SnCe plated	
1	15EDGVC-5.08-Housing	1172A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO Zhuwm	DATE 12/14/07		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
			G.E :			
			FINISH :			
			SCALE : 1:1			
			THIRD ANGLE PROJECTION			
<div><div><b>DEGSON</b>®</div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div> <div>NAME 15EDGVC-5.08-XXP-1Y-00A (H)</div> <div><div>DRAWING NO. 15EDGVC-5.08-E01</div><div>SIZE A3</div><div>REV T1 01/13/09</div></div> <div>DO NOT SCALE DRAWING</div> <div>SHEET 1 OF 1</div>						