
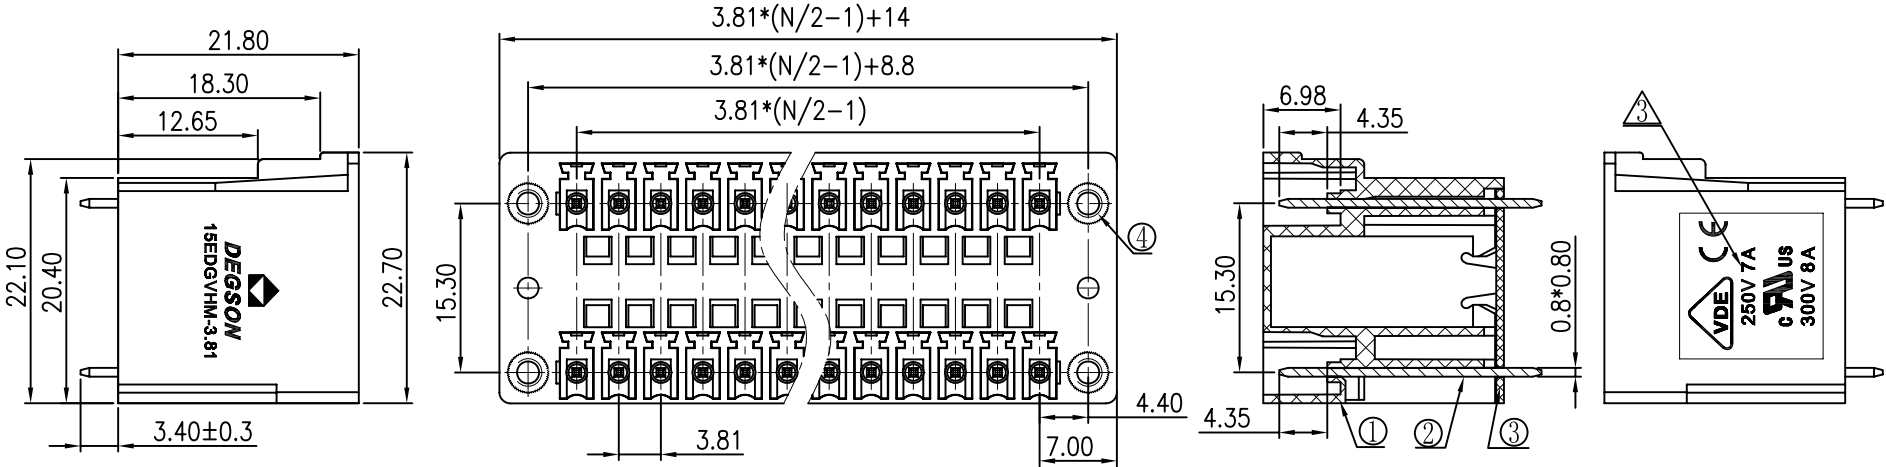



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	CSX	08/31/07	
△		品名、料号增加环保标示“(H)”	LJH	12/11/07	
△		增加VDE及参数刻字	LJH	02/11/09	



- Notes:
- 1. Pitch:3.81mm , Poles:4-48P
  - 2. Rated voltage/current:UL 300V/8A  
VDE 250V/7A
  - 3. Operation temperatures:-40℃~+105℃
  - 4. Withstanding Voltage:AC2000V/1Min
  - 5. Insulation Resistance:5000MΩ/DC1000V
  - 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
	over 6	over 10		over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

4	2EDG-Screw-Cap	S000000040 (H)	4	Brass		
3	15EDGVH-3.81-Cover	1064COYXXA (H)	1	PA66	UL94V-0	
2	15EDGVH-Straight Pin	1063B00030 (H)	XX	Brass	SnCe	
1	15EDGRHM-3.81-Housing	1082AOYXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTES
DETAILED LISTS	<div>← MM (INCH) →</div>		DFTO LIN		DATE 08/02/06"	
	<div>TOLERANCES EXCEPT AS NOTED</div>		CHRD		DATE	
			MFO		DATE	
			APPLY		DATE	
	<div>MM .0 ± .00 ± .000 ±</div>					
			MATERIAL :			
	ANGLES ± 1°		G. E :			
	<div></div> <div>THIRD ANGLE PROJECTION</div>		FINISH :			
			SCALE :			
DO NOT SCALE DRAWING			SHEET 1 OF 1			
<div><div></div><div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div></div> <div>NAME 15EDGVHM-3.81-XXP-1Y-00A (H)</div> <div>DRAWING NO. 15EDGVHM-E01 /PART NO.</div> <div>SHEET 1 OF 1</div> <div>REV T3 02/11/09"</div>						