
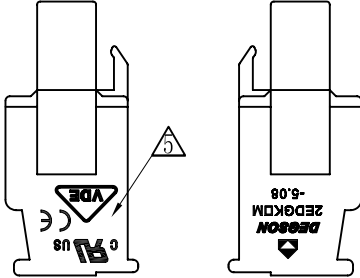



- Notes:
1. Pitch:5.08mm ,Poles:2-22P
  2. Rated voltage/current:UL 300V/15A  
VDE 320V/10A
  3. Operation temperatures:-45℃~+105℃
  4. Withstanding Voltage:AC2000V/1min
  5. Insulation Resistance:5000Ω/DC1000V
  6. Wire Range:28~12AWG, 2.5mm<sup>2</sup>
  7. Max. Torque Value:M2.5, 4.08kgf.cm
  8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

5	2EDGKA/B-5.08 COVER	1028C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phosor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H)	XX+2	Steel	Cr <sup>3+</sup> Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	CSX	04/18/06
△		工程变更	CSX	11/30/06
△		增加UL刻字	CSX	04/05/07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE, CE刻字	WLM	02/12/09



1	2EDGKAM/BM-5.08 HOUSING	1029A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED					
MM (INCH)		DFTO WYP	DATE 06/28/04	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
TOLERANCES EXCEPT AS NOTED		APPVL	DATE		
MM		MATERIAL :		NAME	
.0 ±				2EDGKBM-5.08-XXP-1Y-00A(H)	
.00 ±		G.E :		DRAWING NO. 2EDGKBM-5.08-E01	
.000 ±		FINISH :		/PART NO.	
ANGLES ± 1°		SCALE :		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION				SHEET 1 OF 1	