

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 12A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Wire Range : 26~12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.Wire Range : 0.2~2.5mm²

NOTES2:



- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Stripping length : 9~10mm
- 4.Operating temperature : -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over 6 To 10	Over 10 To 24	Over 30 To 60	Over 60 To 100	Over 100 To 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6.RoHS Compliance

2EDGKDHM - 5.08 - XXP - 1Y - 00A (H)
(RoHS)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

02/03P线结构图

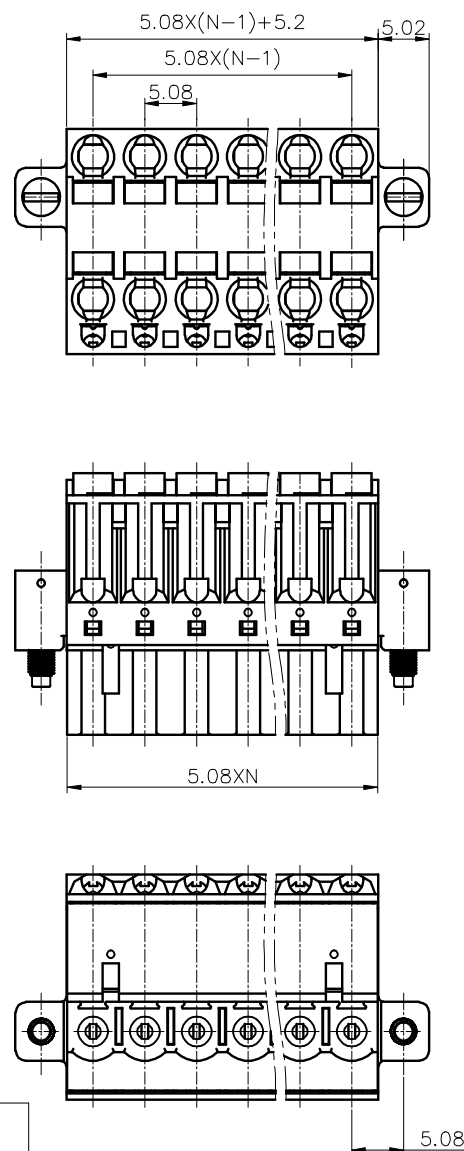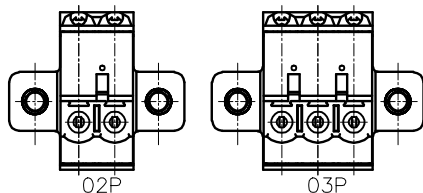

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/				NAME:	
	CHKD:	/				2EDGKDHM-5.08-XXP-1Y-00A(H)	
	DRFT:	/				TITLE: CUSTOMER DRAWING	REV D0
	THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET 1/1		
		MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1