

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated Voltage/Current : 300V / 10A

2.Withstanding Voltage : AC1600V/1Min.

3.Wire Range : 26~12AWG

IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4KV
	Rate Voltage(V)	320V
	Rate Current(A)	20A

2.Wire Range : 1.0~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.00/5.08mm, Poles : N=02-22P/02-16P

3.Stripping length : 9~10mm



4.Operating temperature: -40°C~+105°C

5.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						0.1/10
TO	Over	TO	TO	Over	TO	Over	TO	Over	
6	6	10	30	30	60	100	150	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

6.RoHS Compliance

2EDGKDWM - 5.0/5.08 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

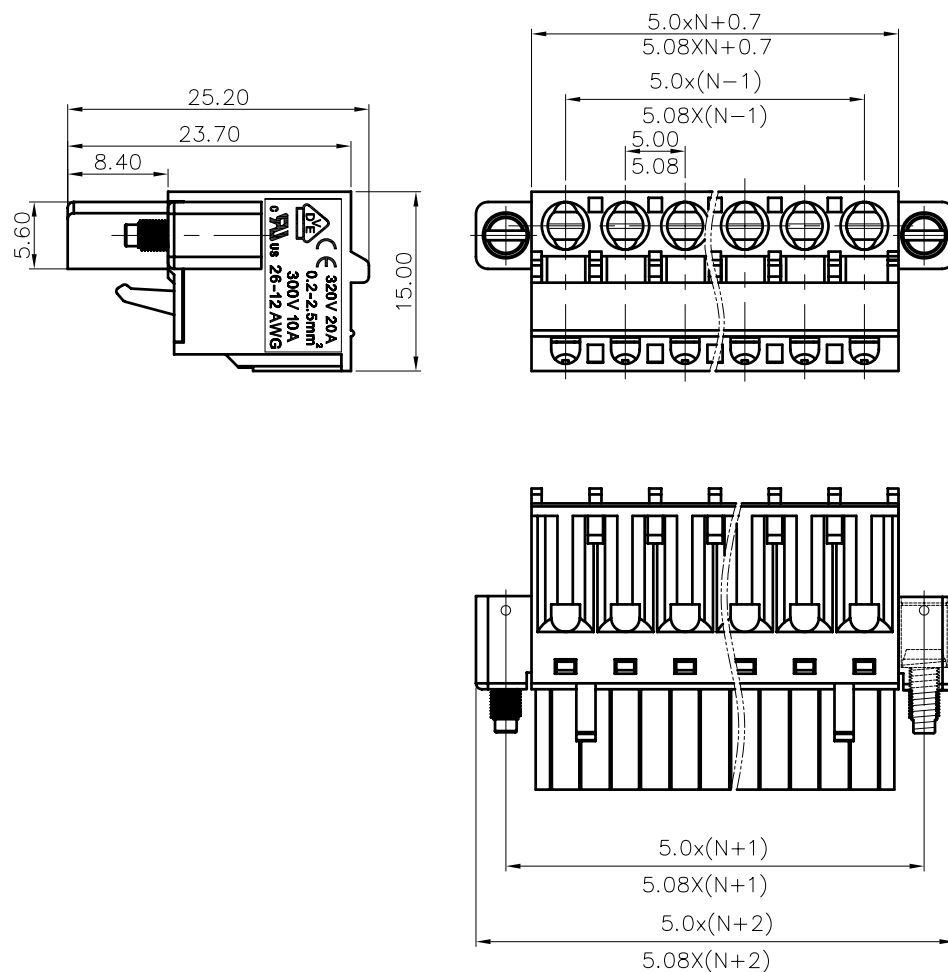

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				2EDGKDWM-5.0/5.08-XXP-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET		1/1
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	