

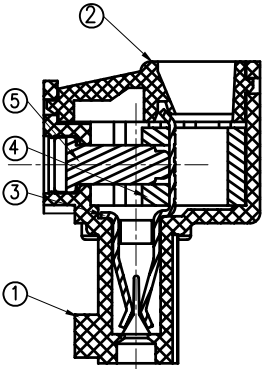
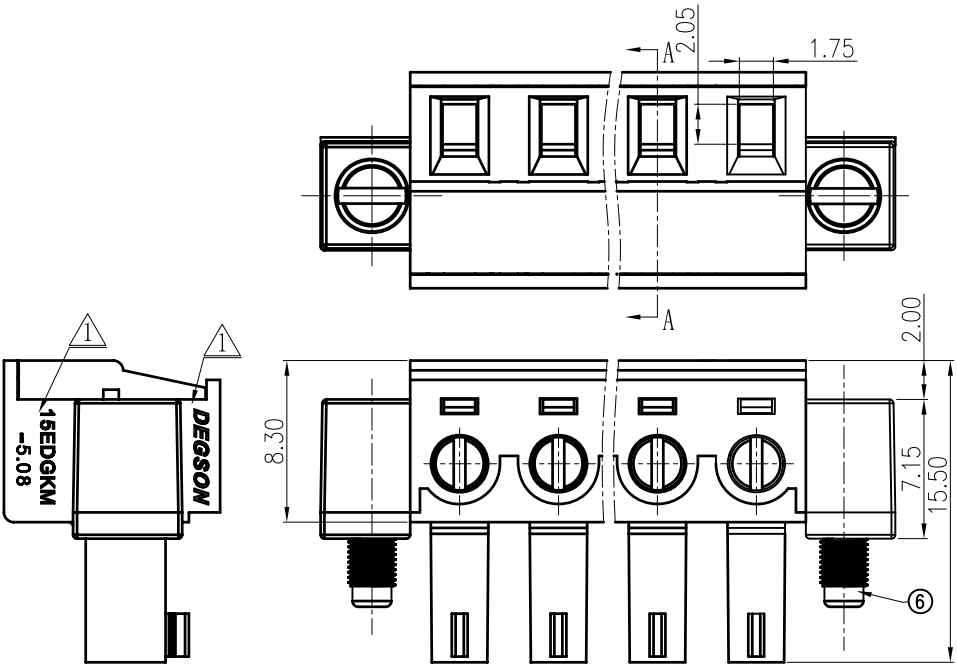


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		增加VDE, UL, CE刻字及商标品名	Zengy	01/13/09	
2		修改螺丝防脱卡点位置及尺寸	WLM	04/21/09	

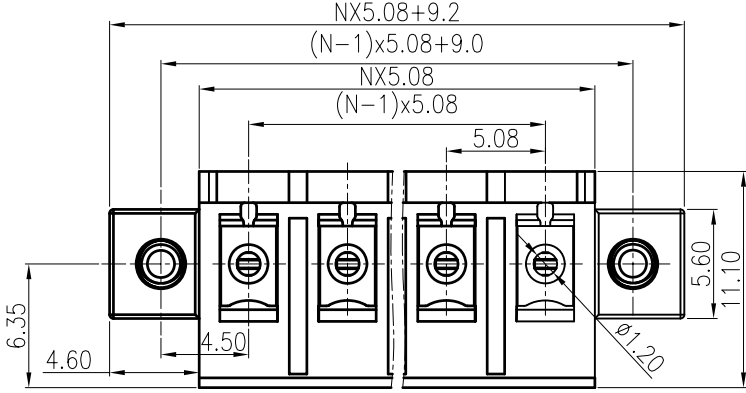

SECTION A-A

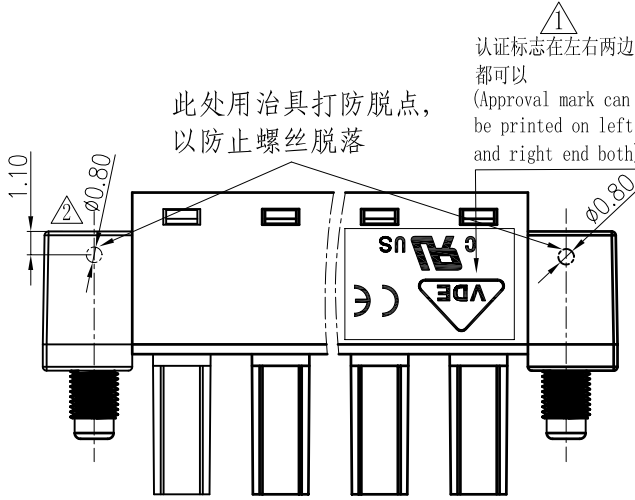

Notes:

- Pitch: 5.08mm, Poles: 2-12P
- Rated voltage/current: UL 300V/8A
VDE 250V/7A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 28~16AWG, 0.5~1.5mm²
- Max. Torque Value: M2, 2.04kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	2EDGKA-""Screws	S000000980 (H)	2	Steel	Cr ³⁺ Zn
5	15EDG-""Screws	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
4	15EDG-Brass cage	X000000010 (H)	XX	Brass	Ni plated
3	15EDG-Clamp	1001B00010 (H)	XX	Phospor Bronze	Ni plated
2	15EDGK-5.08-Cover	1168C0YXXA (H)	1	PA66	UL94V-0

1	15EDGKM-5.08-Housing	1169A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
<div>DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>					
NAME 15EDGKM-5.08-XXP-1Y-00A (H)					
DRAWING NO. 15EDGKM-5.08-E01				SIZE A3	REV T2
/PART NO.				04/21/09	
DO NOT SCALE DRAWING				SHEET 1	OF 1