
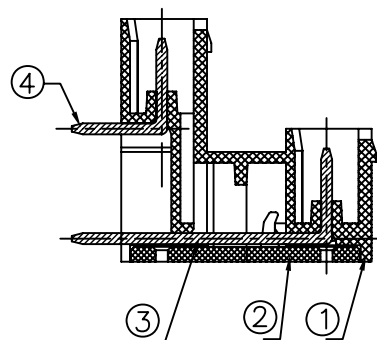



Notes:

- Pitch: 5.08mm, Poles: One-block for 4-24P
Inter locking for 24-48P
- Rated voltage/current: UL 300V/15A
VDE 320V/10A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1Min
- Insulation Resistance: 5000MΩ / DC1000V
- Undimensioned Tolerances:



Pitch range in mm			Nominal dimension range in mm							—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		






SECTION A-A

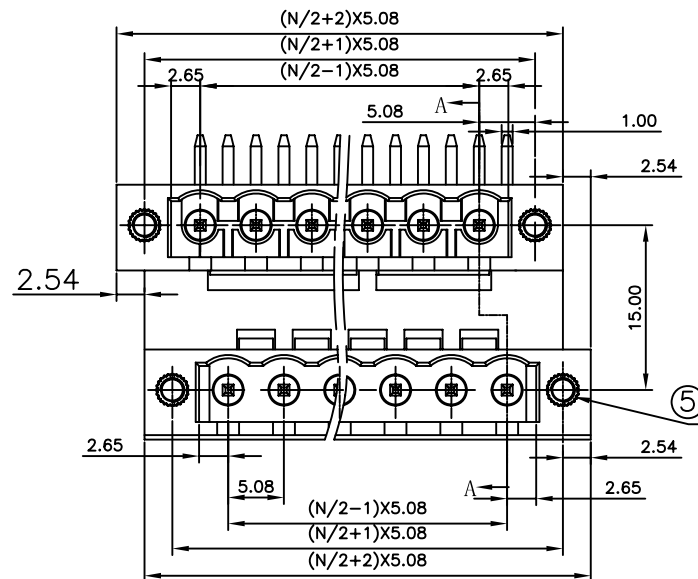

注: C D两处与插头卡勾相配合必须要有凸台, 其余凹槽凸台均不作管控。
(The C and D section must match the contact point with bump.
The rest of groove and bulge are undefined.)

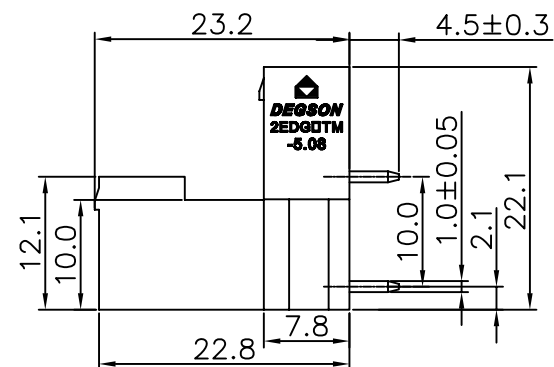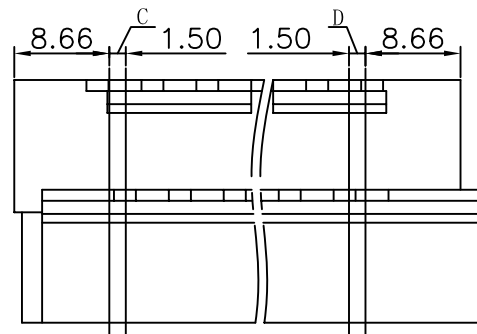

5	2EDG Nut	S000000040 (H)	4	Brass	
4	2EDGRH-short pin	1061B00030 (H)	XX/2	Brass	SnCe
3	2EDGRT-long pin	1032B00020 (H)	XX/2	Brass	SnCe
2	2EDGRT-5.08-Cover	1056C0Y (XX & XX/2 +1) A (H)	1	PA66	>24P
	2EDGRT-5.08-Cover	1056C0Y (XX & XX/2 -1) A (H)	1	PA66	
	2EDGRT-5.08-Cover	1056C0YXXA (H)	1	PA66	≤24P

1	2EDGRTM-5.08 housing (Right foot)	1075A1Y($\frac{XX}{2}$ & $\frac{XX}{2}$ +1)C(H)	1	PA66	>24P	
	2EDGRTM-5.08 housing (Left foot)	1075A1Y($\frac{XX}{2}$ & $\frac{XX}{2}$ -1)B(H)	1	PA66		
		2EDGRTM-5.0 housing	1075A1YXXA(H)	1	PA66	≤24P
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	 MM (INCH)		DFTO Apple	DATE 06/18/'06	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
	.0 ± ±		NAME			
	.00 ± ±		2EDGRTM-5.08-XXP-1Y-00A(H)			
	.000 ± ±		DRAWING NO. 2EDGRTM-5.08-E01			
	ANGLES ± 1°		G.E :		SIZE A3	REV T3
			FINISH :		/PART NO.	
THIRD ANGLE PROJECTION		SCALE :		DO NOT SCALE DRAWING		
			SHEET 1		OF 1	

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE刻字	Zengy	08/30/10
△	10-0308	根据实物更新图面	Golden	09/20/10