
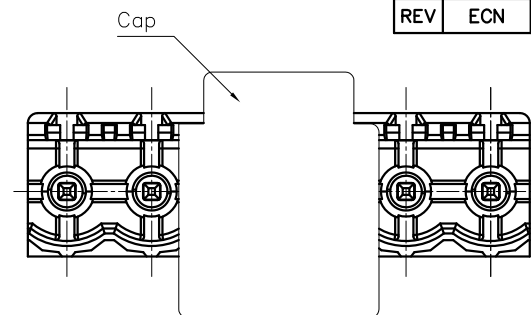


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

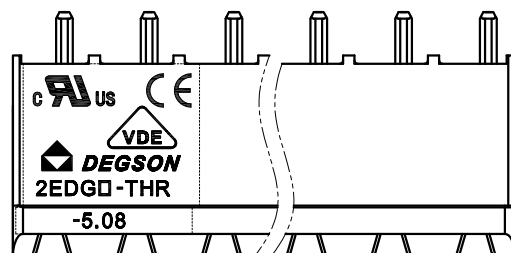

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.00/5.08mm, Poles : N=02~12P
- 3.Operating temperature: -40°C~+130°C
- 4.Undimensioned tolerances:





Pitch range in mm				Nominal dimension range in mm				
TO	Over	Over	TO	TO	Over	Over	Over	0.1/10
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance


2EDGV-THR - 5.00/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
3.(Black)
5.(Orange)

(RoHS)
00A-(Standard)

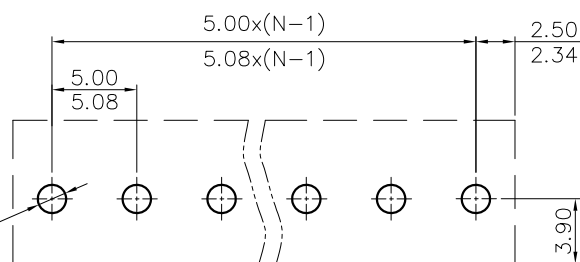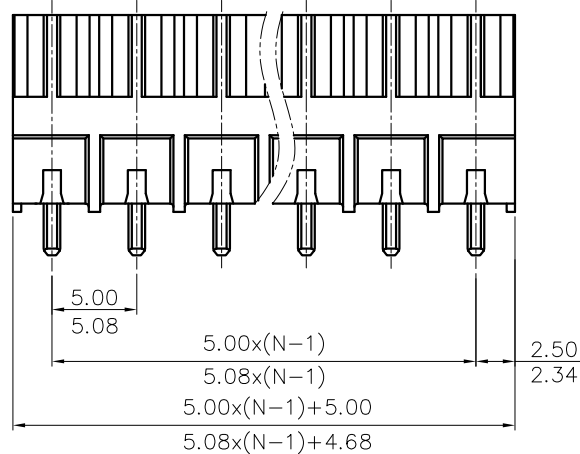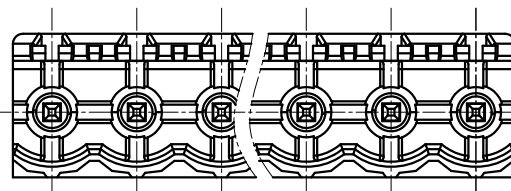

PCB LAYOUT

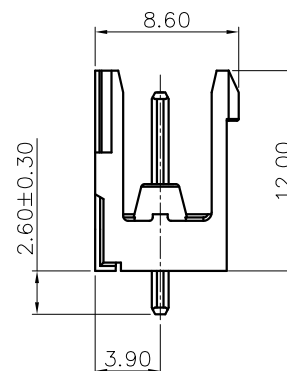

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 2EDGV-THR-5.00/5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV			
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	
		MM (INCH)		1/1	
		DO NOT SCALE DRAWING		SCALE	
				1:1	