

## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

## NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.

## IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A


## NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.50mm, Poles : N=02~12P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm				
TO	Over	TO	Over	TO	Over	
6	6	10	10	30	30	0.1/10
	TO	TO	TO	TO	TO	
	10	24	30	60	100	
					150	
						±2°

## 5.RoHS Compliance






8EDGC - 7.5 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch)(Poles)(Single Pitch) (Color):1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)




02P



03P

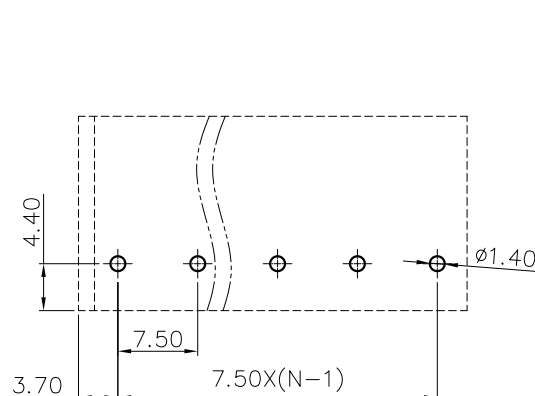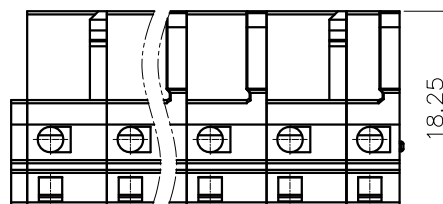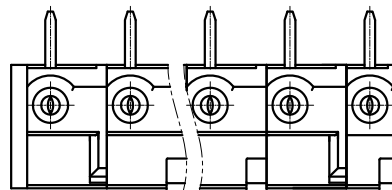

P.C.B LAYOUT

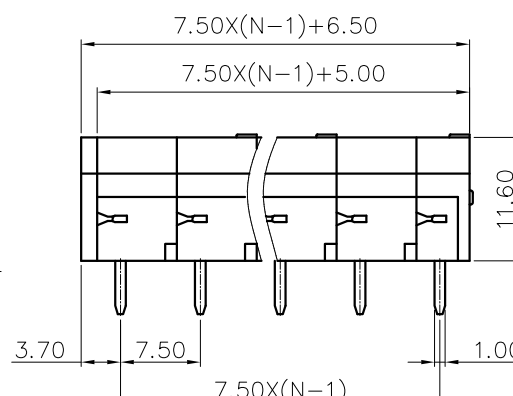

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 8EDGC-7.5-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV			
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	
		DO NOT SCALE DRAWING		1/1	
		SCALE		1:1	