
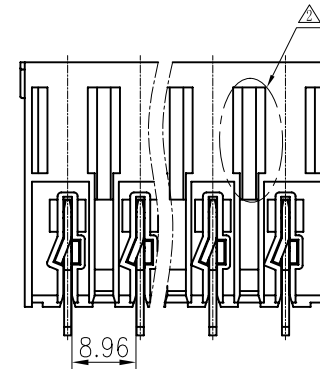


Notes:

1. pitch: 10.16mm, pines: 2-8p
2. Rated current/voltage:
UL 52A/600V
VDE 57A/600V
4. Operation temperatures: -40° ~ +105°
5. Withstanding Voltage: AC3500V/1Min
6. Insulation Resistance: 5000MΩ / DC1000V
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

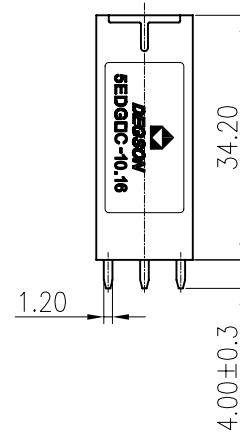

REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
1	0-017	增加UL刻字	06.07.10
2	0-0274	修改外形避专利	08.20.10
3	0-0304	增加VDE CE刻字	09.15.10

1	5EDGRC-10.16-Housing	1194A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS			 DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	TOLERANCES EXCEPT AS NOTED					
	DFTO Zhuwm					DATE 09/05/08"
	CHKD					DATE
	MFO					DATE
	MM		±	NAME 5EDGVC-10.16-XXP-1Y-00A(H)		
	.0 ±		±			
	.00 ±		±			
	.000 ±		±			
	APPLV		DATE			
MATERIAL :		DRAWING NO. 5EDGVC-10.16-E01 /PART NO.				
ANGLES ± 1°					SIZE A3	REV T3 09/15/10"
					DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE : 1:1	SHEET 1 OF 1			

2	5EDGVC-10.16-Pin	1194B00020 (H)	XX	Copper	Ag plated
---	------------------	----------------	----	--------	-----------