

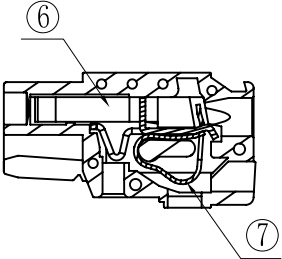



REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	
1	10-0300	视图错误, 更新图面	Golden	09/11/10"	
2	10-0303	增加VDE, CE刻字及参数	Jordan.Y	09/17/10"	

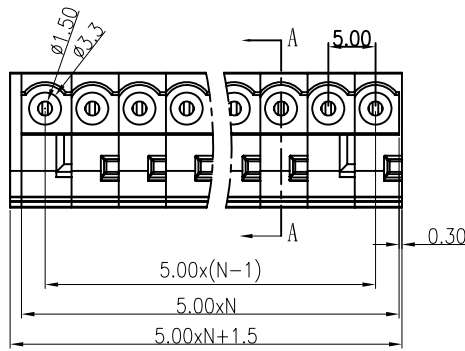




SECTION A-A

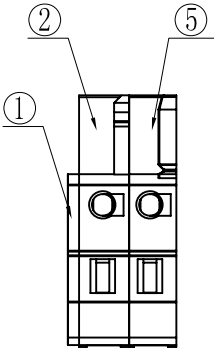

02P

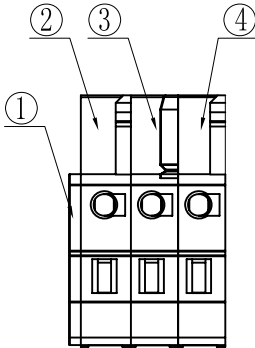


03P

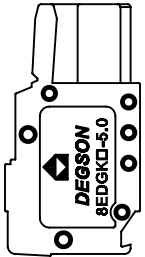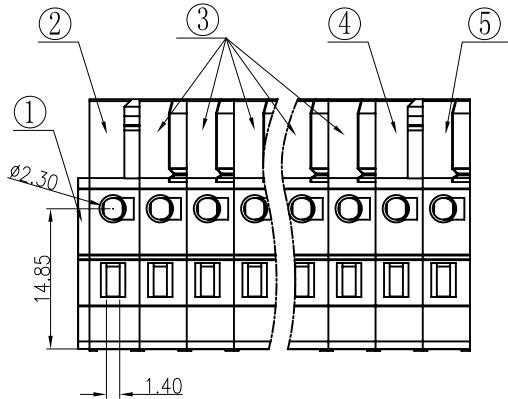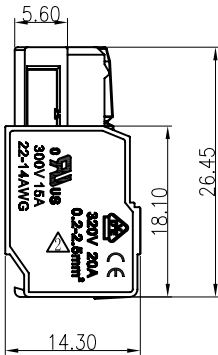


Notes:

1. Pitch: 5.0mm , Poles:XXP
2. Rated voltage/current:UL 300V/15A
VDE 320V/20A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:22~14AWG, 0.2-2.5mm²
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ ◇
±0.10	±0.15	±0.25	±0.25	±0.3	±0.5	±0.7	±1.0	0.05/10

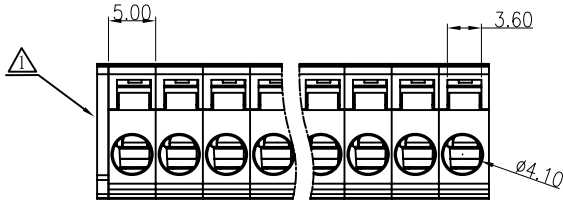

7	DG242-SPRING	X000000990(H)	XX	Stainless Steel	
6	8EDGK-CLAMP	1086B00010(H)	XX	Phosphor Bronze	Tin plated
5	8EDGK-5.0-HOUSING (边件2)	1086A4101C(H)	1	PA66	UL94V-0
4	8EDGKB-5.0-HOUSING (中间件)	1086A4101E(H)	1, (XX≥1) 0, (XX≤3)	PA66	UL94V-0
3	8EDGK-5.0-HOUSING(中间件1)	1086A4101A(H)	XX-3, (XX≥4) XX-2, (XX≤3)	PA66	UL94V-0

2	8EDGKB-5.0-HOUSING (边件)	1086A4101F(H)	1	PA66	UL94V-0			
1	8EDGK-5.0-COVER 盖板	1086C4101A(H)	1	PA66	UL94V-0			
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES			
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO LYK	DATE 09/08/06"				
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPVL	DATE				
	MM .0 ± .00 ± .000 ±		± ± ±		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	MATERIAL :							
	G.E :							
	ANGLES ± 1°		FINISH :		DRAWING NO. 8EDGKB-5.0-E02		SIZE A4	REV T2
			SCALE :		/PART NO.		09/17/10"	
	THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING		SHEET 1 OF 1	