


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		增加DG8HWP塑件及结构变更	Zengy	04/08/09
2	09-0075	增加弹片材质备注	LJH	10/05/09

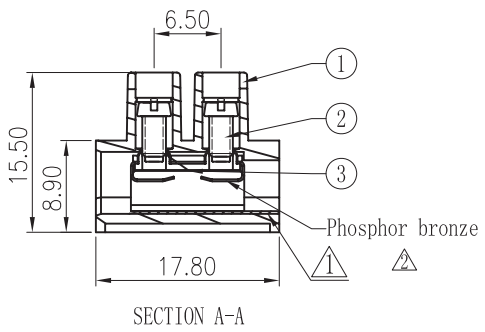

Notes:

1. Pitch: 8.2, Poles: 2-12P
2. Rated voltage/Current: UL1059 300V 15A  
VDE 450V 24A
3. Operation temperatures: -40℃~+105℃
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wier Range: 20-14AWG, 0.5-2.5mm<sup>2</sup>
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

3	DG8HS-Current carrier	X000003250 (H)	XX	Steel+ Phosphor bronze	Cr <sup>3+</sup> Zn
2	DG8H" Screws M2.5	S000001110 (H)	XX*2	Steel	Cr <sup>3+</sup> Zn
1	DG8HWP Housing	2048A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DATE 08/09/07	<b>DEGSON</b> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED	CHKD DATE			
	MM	MFD DATE			
	.00 ±	APPVL DATE			
	.000 ±				
ANGLES ± 1°		G.E :	NAME DG8HWP-1.2-XXP-1Y-100A (H)		
THIRD ANGLE PROJECTION		FINISH:	DRAWING NO. DG8HWP-E01		SIZE A4
		SCALE : 1:1	/PART NO.		REV T2
DO NOT SCALE DRAWING				SHEET 1	OF 1