

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- Rated voltage/current : 300V / 15A
- Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A




NOTES2:


- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 7.50mm, Poles : N=02~12P
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						
TO	Over	Over	TO	Over	Over	Over	Over		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	


5.RoHS Compliance

8EDGBM - 7.5 - XXP - 1Y - 00A (H)
 (Series No.)(Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)






DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: /	NAME:			
	CHKD: /	8EDGBM-7.5-XXP-1Y-00A(H)			
	DRFT: /	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1
 DO NOT SCALE DRAWING			SCALE 1:1		



02P



03P

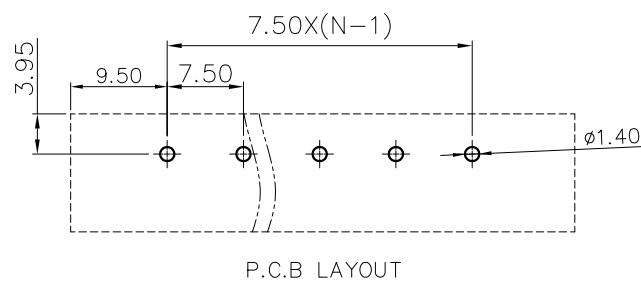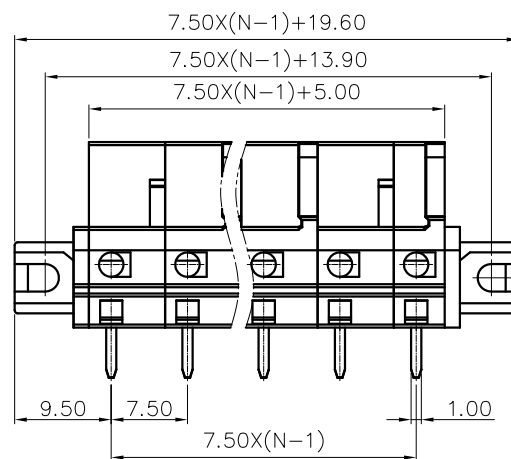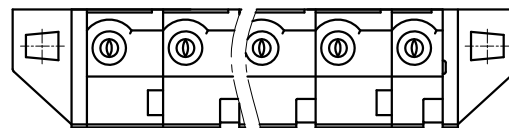

P.C.B LAYOUT