





PCB LAYOUT (REF)





2P

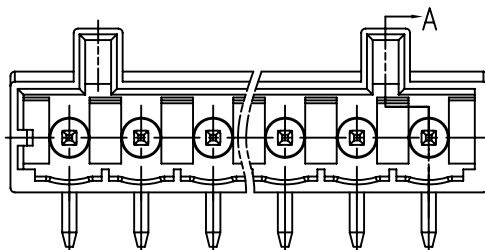


3P



SECTION A-A

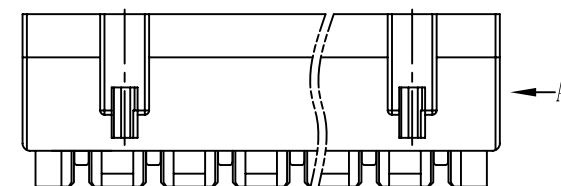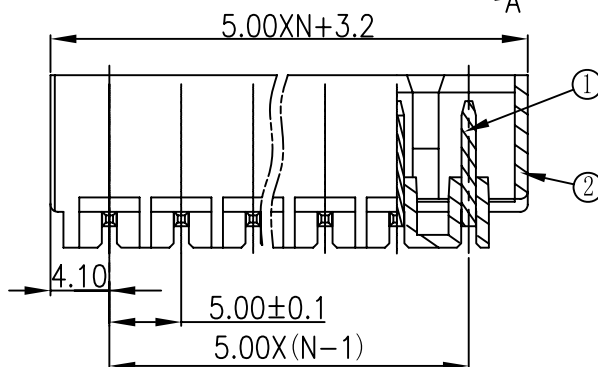

VIEW A

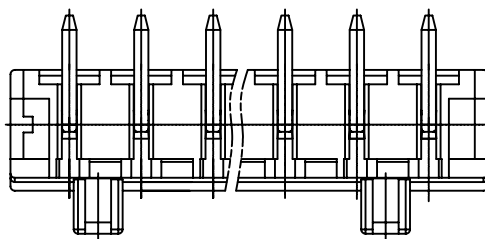

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Notes:

1. Pitch: 5.0mm, Poles: 2-24P
2. Rated voltage/current: UL1059 300V/15A
IEC 320V/20A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ ∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	8EDGRCB-5.0 Pin header	1203B00020 (H)	XX	Copper	SnCe
1	8EDGVCB-5.0 Housing	1203A41XXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO CW	DATE 09/12/09*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME	
ANGLES ± 1°		G.E :		8EDGRCB-5.0-XXP-11-01A(H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. 8EDGRCB-5.0-E01	
		SCALE : 1:1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	