


注: 2-6P带卡点, 7-24P, 不带卡点

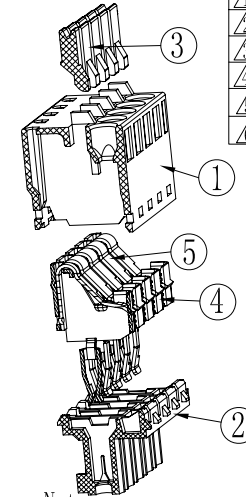

Notes:

1. pitch: 3.81mm poles: 2-24p
2. Rated voltage/current: UL 300V/8A
VDE 250V/12A
3. Insulation Resistance: 5000MΩ/DC1000V
4. Withstanding voltage: AC2000V/1min
5. Wire range: 28-16AWG 0.2-1.5mm²
6. Temp. Range: -40°C ~ +105°C
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	250 to 300	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/0.10	

5	15EDGKD spring	X000001310(H)	XX	stainless steel	
4	15EDGKD PIN	1088B00010(H)	XX	phosphor bronze	Since plated
3	15EDGKD BUTTON	1088D0501A(H)	XX	PA66	UL94V-0
2	15EDGKD-3.81-COVER	1088C0YXXA(H)	1	PA66	UL94V-0

1	15EDGKD-3.81-HOUSING	1088A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO 21mm	DATE 05/31/07	宁波高正电子有限公司 DEGSO ELECTRONICS CO., LTD NAME 15EDGKD-3.81-XXP-1Y-00A(H)	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±				
	ANGLES ± 1°	G.E :		DRAWING NO. 15EDGKD-3.81-E01	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE :		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		品名、料号增加环保标示“(H)”	LJH	12/11/07
2		增加UL刻字	CSX	02/25/08
3		图面整理	hyq	01/21/10
4	10-0160	增加卡点管控	HD	06/01/10
5	10-0254	避专利改外形	HD	06/28/10
6	10-0361	增加VDE刻字及修改参数	ZXX	10/25/10