
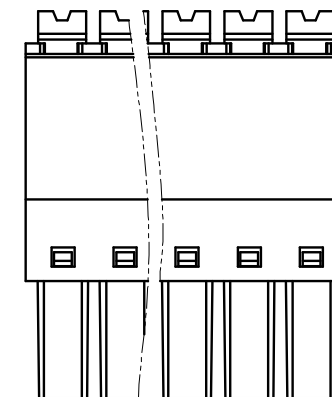
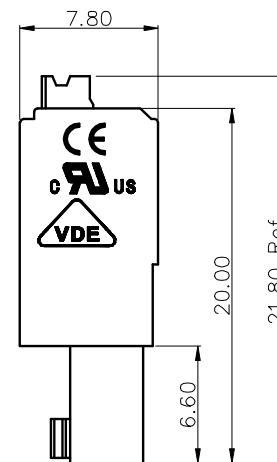
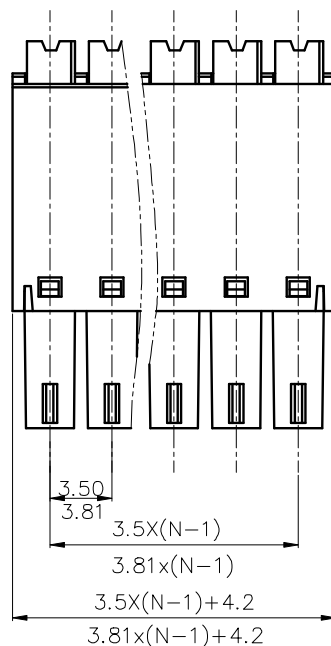



## REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

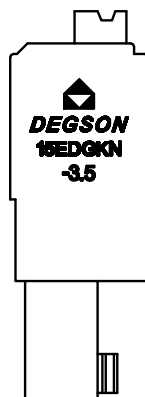

15EDGKN - 3.5/3.81 - XXP - 1Y - 1000A (H)  
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1.(Grey)  
(RoHS)  
2.(Blue)  
3.(Black)  
4.(Green)  
5.(Orange)  
6.(Red)  
7.(Transparent)  
8.(Yellow)  
9.(White)  
1000A-(Standard)

## NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 8A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Wire Range : 28~16AWG

## IEC Standard


1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	8A

2.Wire Range : 0.2~1.0mm<sup>2</sup>

## NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50/3.81mm, Poles : N=2-22P
- 3.Stripping length :10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					A
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150		
							0.1/10	
							<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				DEGSON 宁波德松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: 15EDGKN-3.5/3.81-XXP-1Y-1000A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.:		REV	D0
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET		1/1		SCALE
		1:1							