



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

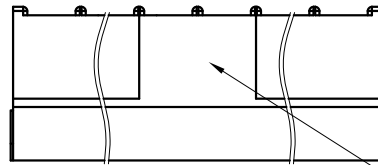

The pad is positioned centrally above the existing positions

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 8A

2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 3.5/3.81mm, Poles : N=02~12P/02~15P





3.Operating temperature: -40°C~+130°C

4.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm							
To	Over	To	Over	To	Over	To	Over	To	
6	10	10	24	30	60	100	150		0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

5.RoHS Compliance

15EDGRC-THR - 3.5/3.81 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):3.(Black)
 (RoHS) 5.(Orange)
 00A-(Standard) 9.(White)

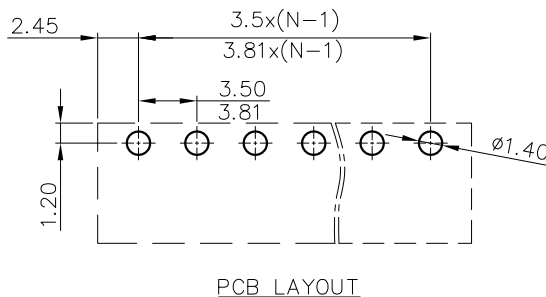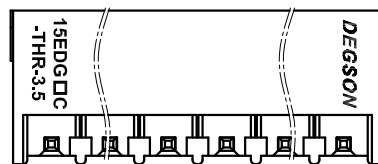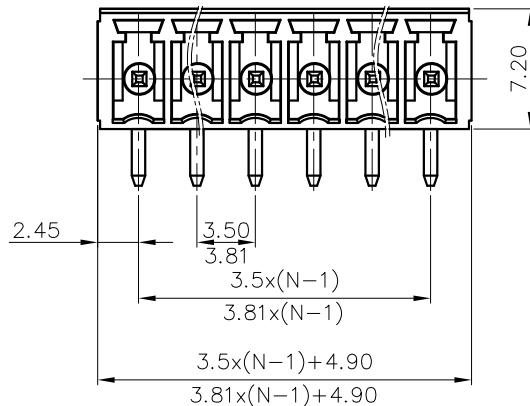

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/			NAME:		
	CHKD:	/			15EDGRC-THR-3.5/3.81-XXP-1Y-00A(H)		
	DRFT:	/			TITLE: CUSTOMER DRAWING		REV
		DRAWING NO.:		/		SHEET	D0
		MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1